



# PRODUCT CATALOGUE



VENOL SYNTHESIS

OV-30

APER/SNI
ACEA CS

WINGING
WINDOWS

BRICHERS

BRICHER

Oils Additives Automotive Chemical

www.venol.de



Venol Motor Oil is a brand that draws extensively from over 20 years of experience across 85 markets worldwide. By combining proven German manufacturing technology with an excellent price-to-quality ratio, Venol delivers outstanding engine oils for various automotive and industrial applications, along with high-quality operating fluids and car care chemicals. Our team consists of experienced professionals who work with passion every day to deliver products that exceed customer expectations.

# **Venol – Experience and Passion.**







Engine oils

Automotive chemicals

www.venol.de

# TABLE OF CONTENTS

Additives for fuels, oils, and Radiators	5
Oils A.M.G. VENOL	7
Engine oils for passenger cars	11
Oils for manual transmissions and differentials	19
Oils for automatic transmissions	23
Motorcycle oils	27
Oils for trucks	31
Oils for agriculture	37
Industrial oils	41
Automotive chemicals	45







## **HOW TO FIX ENGINE FAULTS?**





#### A M G VENOL INJECTION CLEANER GASOLINE

VENOL INJECTION CLEANER GASOLINE is a product designed for effective cleaning of fuel injection systems in gasoline engines. Clean injectors improve fuel atomization, which leads to reduced fuel consumption, less exhaust smoke, and quieter engine operation. Regular use extends engine life. The product is suitable for engines with both port and direct fuel injection systems.

#### A.M.G. VENOL INJECTION CLEANER DIESEL

VENOL INJECTION CLEANER DIESEL is a high-quality product designed for effective cleaning of fuel injection systems in diesel engines. It safely removes carbon deposits from injector nozzles, improving fuel atomization and combustion conditions. Regular use reduces fuel consumption, limits smoke emissions, quiets engine operation, and prolongs the lifespan of the injection system. The product is suitable for all types of injection systems: injection pumps, unit injectors, and Common Rail injectors.






#### A M G VENOL RADIOTOR FLUSH

VENOL RADIOTOR FLUSH is a high-performance cleaner specifically formulated to remove oil residues and limescale deposits from an engine's coolant system. Flushing the system improves both engine cooling and vehicle cabin heating efficiency.

#### A.M.G. VENOL RADIATOR LEAK STOP

VENOL RADIATOR LEAK STOP is a coolant-system additive designed to seal leaks in the radiator, heater core, and coolant hoses. The product reacts with air to form a durable sealing layer. It won't contaminate the coolant or reduce the system's efficiency.

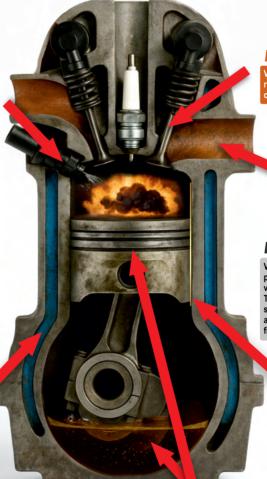



VENOL ENGINE SEAL is an engine-oil additive that rejuvenates rubber seals, effectively reducing oil leaks and preventing oil consumption caused by leaking valve stem seals.





#### A.M.G. VENOL DPF BOOSTER

VENOL DPF BOSTER is a fuel additive designed to clean diesel particulate filters (DPF) in diesel engines. It can be used in all vehicles equipped with a diesel engine and an installed DPF. The product lowers the combustion temperature of accumulated soot, facilitating the regeneration of the filter. Regular use, approximately every 5,000 kilometers, extends the time between filter regeneration cycles and reduces oil dilution by fuel.



#### **A.M.G. VENOL FRICTION REDUCER**

VENOL FRICTION REDUCER is an engine oil additive designed to reduce friction. It is intended for use in all gasoline and diesel engines, both with and without a diesel particulate filter (DPF). The product has a dual action: it forms a durable (50,000 km) ceramic coating and an active chemical layer. The base of the product is a specially formulated mixture of boron nitride and organic molybdenum. The additive protects the engine against dry starts, reduces friction, and extends the engine's lifespan. It can be used with any engine oil.

#### A.M.G. VENOL ENGINE FLUSH

VENOL ENGINE FLUSH is an engine interior cleaning additive used before an oil change. It acts immediately upon application. The product flushes carbon deposits and sludge from oil channels, hydraulic lifters, the oil pan, and piston rings. Engine flushing improves compression and reduces oil consumption. The additive should be used before every engine oil change. It is suitable for all gasoline and diesel engines.











## **ADDITIVES FOR FUELS, OILS, AND RADIATORS**



#### A.M.G. VENOL SPEED BOOSTER BENZIN

Universal gasoline enhancer. The product increases fuel combustion efficiency and cleans the injection system. Regular use extends the lifespan of the injection system.



#### A.M.G. VENOL SPEED BOOSTER DIESEL

Universal Diesel Enhancer. Improves fuel combustion efficiency and cleans the injection system. Regular use extends the lifespan of the fuel



Item No.	Cap.	Pcs in package
711.250	250ml	25



Item No.	Cap.	Pcs in package
710 250	250ml	25



#### A.M.G. VENOL OCTAN BOOSTER

The product increases the octane rating of gasoline and ensures that the engine can reach its full performance potential. Raising the octane number is essential for engines with modified injection and ignition maps, or with mechanical upgrades such as increased boost pressure or compression ratio.



Item No.	Cap.	Pcs in package
636.250	250ml	25



#### A.M.G. VENOL CETAN BOOSTER

A formula that increases the cetane number of diesel fuel, Improving this parameter enhances engine performance, reduces fuel consumption, and results in quieter operation.



Item No.	Сар.	Pcs in packa
638 250	250ml	25



#### A.M.G. VENOL INJECTION CLEANER BENZIN

Cleans and lubricates the entire petrol injection system. Clean injectors improve fuel atomization, resulting in lower fuel consumption, reduced exhaust smoke, and quieter engine operation. Regular use helps extend engine life. Suitable for engines with both port fuel injection (PFI) and direct fuel injection (GDI) systems.



Item No.	Cap.	Pcs in package
644.250	250ml	25



#### A.M.G. VENOL INJECTION CLEANER DIESEL

A highly effective formula for cleaning injection systems in diesel engines. It removes carbon deposits from injector nozzles, improving fuel atomization and combustion conditions. Regular use reduces fuel consumption, lowers exhaust smoke, quiets engine operation, and extends the life of the injection system. Suitable for all types of diesel injection systems, including injection pumps, unit injectors, and Common Rail systems.



Item No.	Cap.	Pcs in package
635.250	250ml	25



#### A.M.G. VENOL DPF BOOSTER

Designed for cleaning particulate filters in all diesel vehicles equipped with both dry and wet DPF systems. The product lowers the soot combustion temperature, which helps to unclog the filter. Regular use every approximately 5,000 kilometers extends the intervals between filter regeneration cycles and reduces oil dilution by fuel.



Item No.	Cap.	Pcs in package
712.250	250ml	25



#### A.M.G. VENOL ENGINE FLUSH

A product for flushing the engine interior before an oil change. Works immediately upon application. The formula removes carbon deposits and sludge from oil channels, hydraulic lifters, the oil pan, and piston rings. Flushing the engine improves compression and reduces oil consumption. Use before every engine oil change. Suitable for all gasoline and diesel engines.



Item No.	Cap.	Pcs in package
701.250	250ml	25



#### A.M.G. VENOL FRICTION REDUCER

Engine Oil Additive for Friction Reduction. This product is designed for use in all gasoline and diesel engines, with or without particulate filters. It offers dual action by creating a durable ceramic coating lasting up to 50,000 km, along with an active chemical layer. The formula is based on a specially composed blend of boron nitride and organic molybdenum. The additive protects the engine from dry starts, reduces friction, and extends engine life. Compatible with all types of engine oils.



Item No.	Cap.	Pcs in package
643.250	250ml	25



#### A.M.G. VENOL ENGINE SEAL

Engine Oil Additive. Restores rubber seals, effectively reducing leaks and oil consumption caused by valve stem seals.



Item No.	Cap.	Pcs in package
643.250	250ml	25



Item No.	Cap.	Pcs in packag
639.250	250ml	25



#### A.M.G. VENOL RADIOTOR FLUSH

A product for removing oil deposits and scale from the engine cooling system. Flushing improves the efficiency of the cooling system and the vehicle's interior heating. Use before every coolant change.



Item No.
637.250



#### A.M.G. VENOL RADIATOR LEAK STOP

This product seals leaks in the radiator, heater core, and hoses. It reacts with air to form a durable sealing layer. The product does not dirty the coolant or reduce the cooling system's efficiency.



Item No.	Сар.	Pcs in package
642.250	250ml	25













## OILS A.M.G. VENOL

#### Engine oils for passenger cars



#### A.M.G. VENOL FULLY SYNTHETIC LONG LIFE SP OW-16

Fuel-efficient, fully synthetic engine oil for hybrid and gasoline engines (including turbocharged and direct injection). Provides easy start-up, engine protection, fuel savings, and extended oil change intervals. Suitable for use in vehicles from Toyota, Honda, Nissan, Lexus, among others.

Specifications and standards: SAE: 0W-16, API: SP/SP-RC, ILSAC: GF-6B

Item No.	Cap.	Pcs per pac
431.001	1L	12
431.004	4L	4
431.020	20L	1
431.060	60L	1
431,208	208L	1



#### A.M.G. VENOL FULLY SYNTHETIC LONG LIFE SP OW-20

High-quality, fully synthetic 0W-20 engine oil for downsized turbocharged gasoline engines and selected diesel engines. Reduces the risk of LSPI, lowers fuel consumption by up to 1.4%, and provides protection and full compatibility with engines requiring this oil grade.

Specifications and standards: SAE: 0W-20, API: SP/SP-RC/SN Plus, ACEA: C6, ILSAC: GF-6B

Recommended for: MB 229.71, MB 229.72; OPEL OV0401547; FORD WSS-M2C952-A1; FIAT 9.55535-GSX; STJLR.03.5006

Item No.	Cap.	Pcs per pack
517.001	1L	12
517.004	4L	4
517.020	20L	1
517.060	60L	1
517 208	2081	1



#### A.M.G. VENOL FULLY SYNTHETIC LONG LIFE SP CF EC OW-30 VW 504/507

Next-generation Long Life engine oil. Provides engine protection, reduces deposits and fuel consumption. Low SAPS technology protects the DPF and catalytic converter. Specifically developed for Volkswagen Group engines.

Specifications and standards: SAE: 0W-30, API: SP, ACEA: C3

Recommended for: VW 504.00/507.00; MB-229.31/229.51, MB 229.52; Porsche C30; BMW Longlife-04; GM DEXOS 2

Item No.	Cap.	Pcs per pac
370.001	1L	12
370.004	4L	4
370.020	20L	1
370.060	60L	1
370,208	208L	1



#### A.M.G. VENOL FULLY SYNTHETIC LONG LIFE SP OW-40

Next-generation Long Life engine oil. Protects the engine, reduces deposits and fuel consumption. The low SAPS formulation protects the DPF and catalytic converter. Designed for Volkswagen Group engines.

Recommended for: VW 502 00/505 00; MB-229 31/229 51; MD-229.31/229.31, Porsche A40; Renault RN 0700/0710; BMW Longlife-04; Fiat 9.55535-S2; GM Dexos 2

Item No.	Cap.	Pcs per pack
519.001	1L	12
519.004	4L	4
519.020	20L	1
519.060	60L	1
519,208	208L	1



#### A.M.G. VENOL FULLY SYNTHETIC LONG LIFE SP CF 5W-20

High-quality synthetic engine oil for turbocharged downsized gasoline engines. Reduces fuel consumption, protects the engine, and is also suitable for diesel engines with exhaust aftertreatment systems.

Specifications and standards: SAE: 5W-20, API: SP/SP-RC/SN Plus, ACEA: C6

Ford WSS-M2C913-A, Ford WSS-M2C913-B, Ford WSS-M2C948-B; Fiat 9.55535-CR1; Jaguar Land Rover STJLR .03.5004; Chrysler MS 6395

Item No.	Cap.	Pcs per pac
422.001	1L	12
422.004	4L	4
422.020	20L	1
422.060	60L	1
422.208	208L	1



#### A.M.G. VENOL FULLY SYNTHETIC LONG LIFE SP CF 5W-30

High-quality synthetic MIDSAPS engine oil. Reduces fuel consumption and prevents LSPI. Designed for gasoline and diesel engines (including those with DPF and Euro VI standard). Compatible with VW engines, including older generations.

Specifications and standards: SAE: 5W-30, API: SP/CF, ACEA: C3

MB-229.31/229.51: Renault RN0700/0710; Porsche C30; BMW Longlife-04; GM DEXOS 2

Item No.	Cap.	Pcs per paci
423.001	1L	12
423.004	4L	4
423.020	20L	1
423.060	60L	1
400 000	2001	4



#### A.M.G. VENOL FULLY SYNTHETIC LONG LIFE SP CF 5W-40

Synthetic engine oil for high-performance engines. Reduces friction and fuel consumption, enhances performance. Provides full engine protection and extends oil change intervals.

Specifications and standards: SAE: 5W-40, API: SP/CF, ACEA: C3

ommended for: BMW Longlife 04; MB 229.31, MB 229.51; Porsche A40; Renault RN 0700/0710; Ford WSS-M2C 937A; VW 502.00/505,00

Item No.	Cap.	Pcs per pack
524.001	1L	12
524.004	4L	4
524.020	20L	1
524.060	60L	1
524.208	208L	1





## Engine oils for sporty passenger cars



#### A\_M,G, VENOL FULLY SYNTHETIC SPORT SN CF 5W-50 A3/B4

Synthetic all-season 5W-50 oil. Provides thermal protection, easy cold starts, and high shear resistance. Reduces fuel consumption and increases engine power and reliability.

Specifications and standards: SAE: 5W-50, API: SN/CF, ACEA: A3/B4

Recommended for: MB 229.3, MB 229.5; Ford WSS-M2C931-C Porche A40

Item No.	Cap.	Pcs per pac
425.001	1L	12
425.004	4L	4
425.020	20L	1
425.060	60L	1
425 208	2081	1



#### A.M.G. VENOL FULLY SYNTHETIC SPORT SN CF 10W-50 A3/B4

Fully synthetic all-season engine oil. Provides thermal protection, easy cold starts, and friction reduction. Increases power, torque, and engine reliability while reducing fuel consumption.

Specifications and standards: SAE: 10W-50, API: SN/CF, ACEA: A3/B4

Recommended for: MB 229.3, MB 229.5; Ford WSS-M2C931-C; Porche A40

Item No.	Cap.	Pcs per pack
371.001	1L	12
371.004	4L	4
371.020	20L	1
371.060	60L	1
274 200	2001	4



#### A.M.G. VENOL FULLY SYNTHETIC SPORT SN CF 10W-60

Fully synthetic oil for high-performance and tuned engines. With esters and PAO additives, it provides protection, friction reduction, lower operating temperatures, increased power, and reliability.

Specifications and standards: SAE: 10W-60, API: SN/CF, ACEA: A3/B4

Recommended for: MB 229.3, MB 229.5; Ford WSS-M2C931-C; Porche A40

Item No.	Cap.	Pcs per paci
516.001	1L	12
516.004	4L	4
516.020	20L	1
516.060	60L	1
516 208	2081	- 1

## Oils for manual transmissions and drive axles



#### A.M.G VENOL FULLY SYNTHETIC GL 575W-90

Modern synthetic GL-5 gear oil for manual transmissions and drive axles. Provides maximum protection and reliability in tough conditions. Designed for passenger cars, trucks, buses, and construction machinery.

Specifications and standards SAE: 75W-90, API: GL-5

Recommended for: MIL-L-2105

Item No.	Cap.	Pcs per pac
730.001	1L	12
730.004	4L	4
730.020	20L	1
730.060	60L	1
730.208	208L	1



#### A.M.G VENOL FULLY SYNTHETIC GL 575W-90 LS

High-quality, fully synthetic GL-5/LS gear oil based on PAO (Group IV). Designed for hypoid gears, differentials, manual transmissions, and limited-slip (LS) gearboxes. Provides exceptional protection, stability, and smooth operation under all conditions.

Specifications and standards

Recommended for: ZFTE-ML07A; ZFTE-ML08

Item No.	Cap.	Pcs per pack
732.0	1L	12
732.0	4L	4
732.0	20L	1
732.0	60L	1



#### A.M.G VENOL FULLY SYNTHETIC GL 575W-140

Next-generation synthetic GL-5 gear oil designed for transmissions and drive axles operating under heavy loads. Provides maximum protection, thermal resistance, and seal compatibility. Recommended for passenger vehicles, trucks, buses, and construction machinery.

Specifications and standards SAE: 75W-140, API: GL-5

Recommended for SCANIA STO 1:0

Item No.	Cap.	Pcs per pack
731.001	1L	12
731.004	4L	4
731.020	20L	1
731.060	60L	1



#### A.M.G VENOL FULLY SYNTHETIC GL-575W/140 LS

Fully synthetic GL-5/LS gear oil based on mPAO (Group IV). Designed for hypoid gears, differentials, manual transmissions, and gearboxes, including those with limited slip (LS). Provides exceptional stability, protection, and smooth operation even under extreme conditions.

Specifications and standards: SAE: 75W-140, API: GL-5

ZFTE-ML07A; ZFTF-ML08

Item No.	Cap.	Pcs per pack
733.001	1L	12
733.004	4L	4
733.020	20L	1
733.060	60L	1
733.208	208L	1



#### OILS A.M.G. VENOL

#### Oils for automatic transmissions



#### A.M.G. VENOLATF VI

Synthetic ATF VI gear oil for modern and older automatic transmissions as well as power steering systems (Dexron VI, III, II). Provides wear protection, low-temperature fluidity, and high thermal stability. Compatible with other ATF oils.

Recommended for:
Acura ATF-Z1;
GM DEXRON®-III+I, GM DEXRON®-VIG;
Ford MERCON®-UV;
Chrysler ATF+3 (MS 7176E), +4 (MS 9602);
TOYOTA/LEXUS TYPE T-III, IV, WS

Item No.	Cap.	Pcs per pac
536.001	1L	12
536.004	4L	4
536.020	20L	1
536.060	60L	1
536 208	2081	- 1



#### A.M.G. VENOLATE CVT

Modern synthetic oil for continuously variable transmissions (CVT). Ensures smooth operation, wear protection, and stability under extreme conditions. For use exclusively in CVT systems.

Recommended for:
Audi/WW TL 52180/G 052 180;
Mercon C, Ford CVT 23/CVT 30;
Honda HMMF; Toyota TC;
Nissan NS-1, NS-2, NS-3;
Mitsubishi CVTF-1/1/5P-III;
Subaru NS-2/Lineartronic CVTF;
Mini Cooper EZI. 799;
Hyundai Genuine CVTF; Hyundai/Kia SP-III;
Suzuki TCNS-2/CVT Green 1;
Dodgel/leep NS-2/CVTF + GM/Saturn DEX-CVT;
MB 238.20

Item No.	Cap.	Pcs per pack
520.001	1	12
520.004	4	4
520.020	20	1
520.060	60	1
520.208	208	1



#### A.M.G. VENOLATF DCT / DSG

Fully synthetic gear oil for dual-clutch transmissions (DSG/DCT). Provides protection under extreme conditions, reduces torque loss and fuel consumption, and extends transmission lifespan.

Recommended for:
Audi/W/TL52180/G 052180;
MerconC, Ford CVT23/CVT30;
Suzukl TC/NS-2/CVT Green;
Honda HMMF, Toyota TC; Nissan NS-1, NS-2, NS-3;
Mitsubish CVTF-1/I/SP-III; Subran NS-2/Lineartronic CVTF;
Mini Cooper EZI. 799; Hyundai Genuine CVTF, Hyundai/Kia SP-III;
Dodge/Jeep NS-2/CVTF + GM/Saturn DEX-CVT; MB 236.20;

(Importnat note: Not recommended for the use in hybrid CV Transmissions of Toyota)

Item No.	Cap.	Pcs per pac
433.001	1L	12
433.004	4L	4
433.020	20L	1
433.060	60L	1
433.208	208L	1

#### Motorcycle oils



#### A.M.G. VENOL 4T SN 5W-40 FULLY SYNTHETIC

100% synthetic oil for 4-stroke motorcycle engines. Delivers maximum power and protects the engine, gearbox, and wet clutch. Meets JASO MA2 requirements. Suitable for both sport and touring motorcycles. Stable across a wide temperature range.

Specifications and standards: SAE: 5W/40, API: SN, ACEA: A3

Recommended for: JASO - MA-2

Item No.	Cap.	Pcs per pac
327.001	1L	12
327.004	4L	4
327.020	20L	1
327.060	60L	1
327,208	208L	1



## OW-16



#### VENOL SYNTHESIS OW16 SP(RC) A5 B5-A7 B7 GF-6B

Engine oil with low viscosity, designed for gasoline engines. Primarily developed for hybrid vehicles and cars equipped with smaller displacement engines. This oil prevents the occurrence of low-speed pre-ignition (LSPI). It offers excellent viscosity stability under all operating conditions and works perfectly with modern emission control systems

Specifications and standards: SAE: 0W-16, API: SP (RC), ACEA: A5/B5 -A7/B7, ILSAC: GF – 6B

Recommended for: TOYOTTA08880-11005; NISSAN HYBRID ENGINE KLANM-01A04 EXTRASAVE X ECO; HONDA08215-99974, 08216-99974, 08232-P99S1LHE; HONDAULTRANEXT; MITSURISHIM7102661 M7102662 MITSUBISHI DIAQUEEN ECO PLUS

270.001	1L	12
270.004	4L	4
270.005	5L	4
270.020	20L	1
270.060	60L	1
270.208	208L	1
270.850	850KG	1

Cap.

Pcs per pack

#### 0W-20



#### VENOL SYNTHESIS OW20 SP (RC) C5 GF-6A

Mid-SAPS engine oil made with ACTIVE POWER technology, designed for passenger cars and light commercial vehicles. Suitable for modern gasoline engines equipped with catalytic converters, as well as turbocharged diesel engines with DPF and TWC systems. It can also be used in hybrid vehicles and cars with smaller displacement engines. The oil maintains optimal engine cleanliness and ensures fuel economy.

Specifications and standards: SAE: 0W-20, API: SP (RC), ACEA: C5/C6, ILSAC: GF-6A

Recommended for:

MB 229,71;

JAGUAR LAND ROVER STJLR.51,5122;

FORD WSS-M2C947-A;

DEXOS 1 GEN.2;

GM 6094 M;

CHRYSLER MS-6395;

HONDA/ACURAHTO-06;

MAZDA; TOYOTA; LEXUS, BUICK; JAGUAR; MITSUBISHI;

SUZUKI, SUBARU; INFINITI; CADILLAC; CHEVROLET

Item No.	Cap.	Pcs per paci
271.001	1L	12
271.004	4L	4
271.005	5L	4
271.020	20L	1
271.060	60L	1
271,208	208L	1
271 850	850KG	1



#### VENOL SYNTHESIS OW20 SP (RC) C5 VW 508 509

A synthetic mid-SAPS engine oil, formulated with ACTIVE POWER technology, designed for year-round use in modern gasoline engines equipped with catalytic converters, as well as in turbocharged diesel engines with exhaust after-treatment systems (DPF, TWC). Recommended for hybrid vehicles and for cars equipped with small-displacement turbocharged gasoline engines. The oil ensures fuel economy and is recommended for VW Group vehicles that meet Euro 6 emission standards.

## Specifications and standards: SAE: 0W-20, API: SP (RC), ACEA: C5

Item No.	Cap.	Pcs per pack
272.001	1L	12
272.004	4L	4
272,005	5L	4
272.020	20L	1
272,060	60L	1
272,208	208L	1
272.850	850KG	1



#### **VENOL SYNTHESIS SILVER SN CF OW20**

Synthetic mid-SAPS engine oil made with ACTIVE POWER technology, designed for year-round use in modern gasoline engines equipped with catalytic converters, as well as turbocharged diesel engines with emission control systems (DPF, TWC). Recommended for hybrid vehicles and vehicles with small-displacement turbocharged gasoline engines. The oil ensures fuel economy and is recommended for VW Group vehicles meeting Euro 6 emission standards.

SAE: 0W-20, API: SN/CF, ACEA: A5/B5, ILSAC: GF-6A

FORD WSS-M2C947—A; CHRYSLER MS-6395, MS-13340; JAGUAR LAND ROVER STJLR.51.5122; HONDA; HYUNDAI; KIA; GENERAL MOTORS

Item No.	Cap.	Pcs per pack
872.001	1L	12
872.004	4L	4
872.005	5L	4
872.020	20L	1
872.060	60L	1
872,208	208L	1
872.850	850KG	1

#### OW-30



#### VENOL SYNTHESIS OW30 SP A5/B5/C2 GF 6A

ACTIVE POWER technology engine oil with low ash content, designed for cars equipped with gasoline and diesel engines. It is recommended for use in engines with DPF (diesel particulate filter) and TWC (three-way catalyst). Suitable for passenger cars where ACEA C2 standard oils are recommended. Thanks to its formulation, the oil minimizes the likelihood of low-speed pre-ignition (LSPI).

SAE: 0W-30, API: SP, ACEA: A5/B5/C2, ILSAC: GF-6A

#### commended for:

FORD WSS-M2C950-A; JAGUAR LAND ROVER STJLR 03.5007

Item No.	Cap.	Pcs per pac
273.001	1L	12
273.004	4L	4
273.005	5L	4
273.020	20L	1
273.060	60L	1
273.208	208L	1
273 850	850KG	1



#### VENOL SYNTHESIS OW30 C3 VW 504/507 SP/SN+

Long Life engine oil designed for gasoline and diesel engines. It ensures optimal performance and full engine protection under all operating conditions. Helps reduce particulate deposits on DPF filters and decreases the risk of catalyst poisoning in spark-ignition engines. Reduces fuel consumption and allows for extended oil change intervals. Recommended for Volkswagen Group vehicles.

Specifications and standards: SAE: 0W-30, API: SP/SN+, ACEA: C3

#### VW 504.00/507.00;

MB 229.51: BMW LONGLIFE 04: PORSCHE C30

Item No.	Cap.	Pcs per paci
275.001	1L	12
275.004	4L	4
275.005	5L	4
275.020	20L	1
275,060	60L	1
275,208	208L	1
275.850	850KG	1



#### **VENOL SYNTHESIS SILVER SNCG OW30**

Engine oil with ACTIVE POWER technology, designed for gasoline and diesel engines. The advanced oil formulation allows full utilization of engine power and torque. It significantly facilitates cold engine starts and guarantees long-lasting, trouble-free operation.

Specifications and standards: SAE: 0W-30, API: SN/CG, ACEA: A5/B5

#### VW 502.00/505.00: MB 229.3; BMW LL 01;

GM-LL-B-025 GM-LL-5-023, PCRSCHEA40; RENAULT RN 0700/0710; FORD; FIAT; TOYOTA; PEUGEOT; HONDA

item No.	Cap.	Pcs per paci
144.001	1L	12
144.004	4L	4
144.005	5L	4
144.020	20L	1
144.060	60L	1
144.208	208L	1
144.850	850KG	1





#### ENGINE OILS FOR PASSENGER CARS



#### 0W-40



#### **VENOL SYNTHESIS SUPER SN SM CF OW40**

Engine oil with ACTIVE POWER technology, designed for year-round use in vehicles equipped with gasoline and turbocharged diesel engines, including engines with unit injector (pump-injector) systems. It facilitates cold engine starts, extends oil change intervals, and reduces fuel consumption.

Specifications and standards: SAE: 0W-40, API: SN/SM/CF, ACEA: A3/B4

MR 229 3: MR 229 5 BMW LL-01; PORSCHE A40: GM II B 025 RENAULT RN 0700/0710; FIAT 9.55535-M2: CHRYSLER MS-12633

Item No.	Cap.	Pcs per pack
007.001	1L	12
007.004	4L	4
007.005	5L	4
007.020	20L	1
007.060	60L	1
007.208	208L	1
007.850	850KG	1

#### 5W-20



#### VENOL SYNTHESIS 5W20 SP C5 GF-6A

Engine oil made with ACTIVE POWER technology, designed for passenger cars equipped with gasoline engines, including turbocharged ones, as well as diesel engines, including those with turbocharging. It is also suitable for use in gasoline engines of hybrid vehicles. The oil is produced using base oils derived from catalytic and highly selective refining of crude oil. Thanks to the use of optimal friction modifiers, the oil offers high stability at all temperatures.

Specifications and standards: SAE: 5W-20, API: SP, ACEA: C5, ILSAC: GF-6A

Recommended for:
JAGUAR LAND ROVER STJLR.03.5004;
DEXOS 1 GEN 2;
CHRYSLER MS-6395;
FIAT9.55535-CR1;
HONDA/ACURAHTO-06;
FORD WSS-M2C930-A, FORD WSS-M2C930-B,
FORD WSS-M2C954-B, FORD WSS-M2C948-B;
MAZDA; TOYOTA; NISSAN; SUZUKI

Item No.	Cap.	Pcs per pack
276.001	1L	12
276.004	4L	4
276,005	5L	4
276.020	20L	1
276.060	60L	1
276,208	208L	1
276.850	850KG	1



#### VENOL SYNTHESIS GOLD SN CF 5W20

Multigrade engine oil designed for combustion engines. Suitable for use in gasoline engines operating under various conditions. It provides complete engine protection and helps reduce fuel consumption. Allows for extended oil change intervals.

Specifications and standards: SAE: 5W-20, API: SN/CF, ACEA: A5/B5

Item No.	Cap.	Pcs per pack
236.001	1L	12
236.004	4L	4
236.005	5L	4
236.020	20L	1
236.060	60L	1
236.208	208L	1
226 050	0EUKC	4

#### 5W-30



#### VENOL SYNTHESIS PREMIUM ULTRA SP 5W30 C2

Multigrade engine oil designed for vehicles with gasoline or diesel engines, with or without turbocharging, and equipped with emission reduction systems such as DPF (diesel particulate filter) and TWC (three-way catalyst). The advanced additive packages used in the oil formulation protect the engine against wear and low-speed pre-ignition (LSPI). The oil prevents deposit formation, reduces fuel consumption,

and extends engine life.

SAE: 5W-30, API: SP, ACEA: C2, ILSAC: GF-6A

CHRYSLER MS 6395; FIAT 9.55535-CR1; GM 4718M, 6094M; FORD M2C929-A, M2C946-A, M2C946-B; DEXOS 1 GEN 2; TOYOTA; HONDA; NISSAN; HYUNDAI

Item No.	Cap.	Pcs per pack
376.001	1L	12
376.004	4L	4
376.005	5L	4
376.020	20L	1
376.060	60L	1
376.208	208L	1
376 850	850KG	1



#### **VENOL SYNTHESIS PREMIUM PLUS SP SN+5W30 C2**

Multigrade engine oil with ACTIVE POWER technology, designed for passenger cars and light commercial vehicles equipped with gasoline or diesel engines, with or without turbocharging, and fitted with emission reduction systems such as DPF (diesel particulate filter) and TWC (three-way catalyst). Recommended for vehicles that meet Euro 6 emission standards. Especially recommended for FIAT and PSA Group vehicles

Specifications and standards: SAE: 5W-30, API: SP/SN+, ACEA: C2, ILSAC: GF-5

Recommended for: VW 502.00/505.00/505.01; JAGUAR LAND ROVER JLR STLIR-03.5005; MB 229.31; FORD 934-B; PSAB71 2290; FIAT 9.55535-S1; GM DEXOS 2

Item No.	Сар.	Pcs per paci
810.001	1L	12
810.004	4L	4
810.005	5L	4
810.020	20L	1
810.060	60L	1
810,208	208L	1
810.850	850KG	1



#### VENOL SYNTHESIS PREMIUM PLUS SP SN+5W30 C3

Engine oil with ACTIVE POWER technology, designed for vehicles equipped with gasoline and diesel engines operating under various conditions. Recommended for use in engines with DPF (diesel particulate filter) and TWC (three-way catalyst). Suitable for vehicles meeting Euro 6 emission standards. Especially recommended for vehicles from BMW, Mercedes-Benz, and Volkswagen.

Specifications and standards: SAE: 5W-30, API: SP/SN+, ACEA: C3, ILSAC: GF-5

VW 502.00/505.00/505.01; MB 229.31/229.51/229.52/226.5; RENAULT RN 0700/0710; FORD WSS-M2C917A; PORSCHE C30; BMW LONGLIFE-04: GM DEXOS 2; CHRYSLER MS-11116/MS-11106; FIAT 9.55535-S3; KIA; TOYOTA; HONDA; SUZUKI; NISSAN

Item No.	Cap.	Pcs per pack
198.001	1L	12
198.004	4L	4
198.005	5L	4
198.020	20L	1
198.060	60L	1
198.208	208L	1
198,850	850KG	1



#### VENOL SYNTHESIS PREMIUM PLUS SN CF 5W30 C4

Multigrade engine oil with ACTIVE POWER technology, designed for vehicles equipped with gasoline and diesel engines operating under various conditions. Recommended for use in engines with DPF (diesel particulate filter) and TWC (three-way catalyst). Suitable for vehicles meeting Euro 6 emission standards. Especially recommended for Nissan-Renault Group vehicles.

Specifications and standards: SAE: 5W-30, API: SN/CF, ACEA: C4

MR 229 31

MB 226 51 MB 229.51 RENAULT RN 0720

Item No.	Сар.	Pcs per pack
811.001	1L	12
811.004	4L	4
811.005	5L	4
811.020	20L	1
811.060	60L	1
811,208	208L	1
811.850	850KG	1



#### 5W-30



#### **VENOL SYNTHESIS ECONOMIC SM SL CF 5W30**

Long Life engine oil designed for gasoline and diesel engines. It ensures optimal engine performance and full protection under all operating conditions. It helps reduce particulate buildup in DPF filters and lowers the risk of catalyst poisoning in sparkignition engines. The oil reduces fuel consumption and allows for extended oil change intervals. Recommended for Volkswagen Group vehicles.

Specifications and standards: SAE: 5W-30, API: SM/SL/CF, ACEA: C3

VW 504.00/507.00; MB 229.51; BMW LONGLIFE-04:

Item No.	Cap.	Pcs per pac
009.001	1L	12
009.004	4L	4
009.005	5L	4
009.020	20L	1
009.060	60L	1
009.208	208L	1
009,850	850KG	1



#### **VENOL SYNTHESIS PREMIUM SN CF 5W30**

Engine oil with ACTIVE POWER technology, designed for year-round use in vehicles equipped with gasoline engines, turbocharged diesel engines, and engines with unit injector (pump-injector) systems. It facilitates cold starts, extends oil change intervals. and reduces fuel consumption

Specifications and standards: SAE: 5W-30, API: SN/CF, ACEA: A3/B4

Recommended for: MB 229.1/229.5; VW 502.00/505.00/505.01; GM-LL-B-025; PORSCHE A40; RENAULT RN 0710/0700; BMW LL-01;

FIAT; TOYOTA; HONDA; MITSHUBISHI

Item No.	Cap.	Pcs per pack
232.001	1L	12
232.004	4L	4
232.005	5L	4
232.020	20L	1
232.060	60L	1
232,208	208L	1
232.850	850KG	1



#### **VENOL SYNTHESIS PREMIUM SM CF 5W30**

Engine oil with ACTIVE POWER technology, designed for year-round use in vehicles equipped with gasoline and turbocharged diesel engines, as well as engines with unit injector (pump-injector) systems. It facilitates cold starts, extends oil change intervals, and reduces fuel consumption.

Specifications and standards: SAE: 5W-30, API: SM/CF, ACEA: A3/B4

Recommended for: MB 229.1/229.5; VW 502.00/505.00/505.01; GM-LL-B-025; PORSCHEA40; RENAULT RN 0710/0700; RMW II - 01 BMW LL-01; FIAT; TOYOTA; HONDA; MITSHUBISHI

item No.	Cap.	Pcs per paci
008.001	1L	12
008.004	4L	4
008.005	5L	4
008.020	20L	1
008.060	60L	1
008.208	208L	1
008 850	850KG	1



#### **VENOL SYNTHESIS PREMIUM SLCF 5W30**

Engine oil produced with ACTIVE POWER technology, designed for lubricating gasoline and diesel engines without particulate filters. Mainly used in engines operating in passenger cars, light commercial vehicles, and sport utility vehicles. Facilitates cold engine starts.

Specifications and standards. SAE: 5W-30, API: SL/CF, ACEA: A3/B4

MB 229.1/229.5; VW 502.00/505.00/505.01; RENAULT RN 0700/0710; FIAT; TOYOTA; HONDA; MITSUBISHI

Item No.	Cap.	Pcs per pac
760.001	1L	12
760.004	4L	4
760.005	5L	4
760.020	20L	1
760,060	60L	1
760,208	208L	1
760.850	850KG	1

#### 5W-40



#### **VENOL SYNTHESIS GOLD PLUS SN CF5W40 C2**

Multigrade engine oil with ACTIVE POWER technology, designed for gasoline and diesel engines. Recommended for use in engines equipped with DPF (diesel particulate filter) and TWC (three-way catalyst). The oil helps reduce harmful emissions by lowering fuel consumption without compromising engine power. It ensures reliable engine performance in stop-and-go driving conditions. Recommended for vehicles meeting Euro 6 emission standards

Recommended for: Recommended for: VW 502.00155.001505.01; JAGUARLAND ROVER JLR STLIR-03.5005; MB 229.31; FORD 934-B; PSAB71 2290; FIAT 9.55535-S1; CMDEYAGE 2

Item No.	Cap.	Pcs per pac
628.001	1L	12
628.004	4L	4
628.005	5L	4
628.020	20L	1
628.060	60L	1
628,208	208L	1



#### **VENOL SYNTHESIS GOLD PLUS SN CF 5W40 C3**

Engine oil with ACTIVE POWER technology, designed for gasoline and diesel engines operating under various conditions. Recommended for use in engines equipped with DPF (diesel particulate filter) and TWC (three-way catalyst). Contributes to reducing harmful emissions by lowering fuel consumption without compromising engine power. Recommended for vehicles meeting Euro 6 emission standards

Specifications and standards: SAE: 5W-40, API: SN/CF, ACEA: C3

VW 502.00/505.00/505.01: MB 229.31/226.5: RENAULT RN 0700/0710: PORSCHEA40; FORD WSS-M2C917A;

GM DEXOS 2

MWLONGLIFE-04; GMDEXOS 2; FIAT 9.55535-S2/9.55535-GH2; KIA; TOYOTA

Item No.	Cap.	Pcs per pack
217.001	1L	12
217.004	4L	4
217.005	5L	4
217.020	20L	1
217,060	60L	1
217,208	208L	1
217.850	850KG	1



#### **VENOL SYNTHESIS GOLD PLUS SN CF 5W40 C4**

Multigrade engine oil with ACTIVE POWER technology, designed for gasoline and diesel engines operating under various conditions. Recommended for use in engines equipped with DPF (diesel particulate filter) and TWC (three-way catalyst). Helps reduce harmful emissions by lowering fuel consumption without compromising engine power. Recommended for vehicles meeting Euro 6 emission standards.

Specifications and standards: SAE: 5W-40, API:SN/CF, ACEA: C4

MR 229 31 MB 226.51 MB 229.51 RENAULT RN 0720

item No.	Cap.	PCS per pack
885.001	1L	12
885.004	4L	4
885.005	5L	4
885.020	20L	1
885.060	60L	1
885,208	208L	1
885,850	850KG	1





#### **ENGINE OILS FOR PASSENGER CARS**



#### 5W-40



#### VENOL SYNTHESIS GOLD SN CF 5W40

Multigrade engine oil with ACTIVE POWER technology, designed for gasoline and diesel engines in passenger cars, light commercial vehicles, and sport utility vehicles. Facilitates cold engine starts, extends oil change intervals, and reduces fuel consumption.

Specifications and standards: SAE: 5W-40, API: SN/CF, ACEA: A3/B4

KIA TOYOTA: CHRYSI FR: HONDA: NISSAN

VW 502.00/505.00; RENAULT RN 0700/0710;

233.001	1L	12
233.004	4L	4
233.005	5L	4
233.020	20L	1
233.060	60L	1
233,208	208L	1
233,850	850KG	1

Pcs per pack



#### VENOLSYNTHESIS GOLD SM CF 5W40

Multigrade engine oil with ACTIVE POWER technology, designed for gasoline and diesel engines in passenger cars, light commercial vehicles, and sport utility vehicles. Facilitates cold engine starts, extends oil change intervals, and reduces fuel consumption.

Specifications and standards: SAE: 5W-40, API: SM/CF, ACEA: A3/B3

Recommended for: VW 502.00/505.00; RENAULT RN 0700/0710; MB 229.1/229.3/229.5; KIA, TOYOTA; CHRYSLER; HONDA; NISSAN

Item No.	Cap.	Pcs per pack
002.001	1L	12
002.004	4L	4
002.005	5L	4
002.020	20L	1
002.060	60L	1
002.208	208L	1
000 050	0EUKC	4



#### VENOLSYNTHESIS GOLD SLCF 5W40

Multigrade engine oil with ACTIVE POWER technology, designed for modern gasoline and diesel engines. Primarily intended for use in passenger cars and light commercial vehicles. Facilitates cold engine starts and keeps the engine clean.

Specifications and standards: SAE: 5W-40, API: SL/CF, ACEA: A3/B4

Recommended for: MB 229.1/229.3/229.5; VW 502.00/505.00; RENAULT RN 0700/0710; TOYOTA; KIA; CHRYSLER

Item No.	Cap.	Pcs per pac
761.001	1L	12
761.004	4L	4
761.005	5L	4
761.020	20L	1
761.060	60L	1
761.208	208L	1
761.850	850KG	1



#### VENOL SYNTHESIS DIESEL CG SM 5W40

Engine oil with ACTIVE POWER technology, designed for heavily loaded gasoline and diesel engines in passenger cars, light commercial vehicles, and sport-utility vehicles. It guarantees maximum power output and engine protection for all vehicle models operating under various climatic conditions.

Specifications and standards: SAE: 5W-40, API: CG/SM, ACEA: A3/B4

Recommended for: MB 229.3/229.5; VW 502.00/505.00; RENAULT RN 0700/0710; BMW LL-98; GM-LL-B-025; FIAT 9.55535-M2; FORD; TOYOTA; SUZUKI; HONDA; MITSUBISHI

Item No.	Cap.	Pcs per pack
139.001	1L	12
139.004	4L	4
139.005	5L	4
139.020	20L	1
139,060	60L	1
139,208	208L	1
139,850	850KG	1

#### 5W-50



#### **VENOL SYNTHESIS GOLD SM SL CF 5W50**

Engine oil with ACTIVE POWER technology, designed for turbocharged gasoline and diesel engines, as well as engines with unit injector (pump-injector) systems. Ideal for motorsports. Facilitates cold engine starts and extends oil change intervals, significantly reducing fuel consumption.

Specifications and standards: SAE: 5W-50, API: SM/SL/CF, ACEA: A3/B4

Recommended for: MB 229.3; FORD; ISUZU; TOYOTA

Item No.	Cap.	Pcs per pack
001.001	1L	12
001.004	4L	4
001.005	5L	4
001.020	20L	1
001.060	60L	1
001.208	208L	1
001 850	850KG	1

#### 10W-60



#### **VENOL SYNTHESIS SPORT SM CF 10W60**

Engine oil with ACTIVE POWER technology, designed for heavily loaded turbocharged gasoline and diesel engines. It guarantees engine lubrication under the most severe conditions, including low temperatures (cold start) and high temperatures when the engine is running at maximum heat. Provides full engine protection during high-performance sports driving.

Recommended for: MB 229.1; VW 501.01/505.00; JASO MA-2; BMW; HONDA; CHRYSLER; FORD

Item No.	Cap.	Pcs per pack
131.001	1L	12
131.004	4L	4
131.005	5L	4
131.020	20L	1
131,060	60L	1
131,208	208L	1
131,850	850KG	1



#### 10W-30



#### **VENOL SEMISYNTHETIC SM SLCF 10W30**

Semi-synthetic engine oil with ACTIVE POWER technology, designed for year-round use in modern gasoline and turbocharged or naturally aspirated diesel engines. Reduces the risk of valve wear and ensures perfect lubrication and engine protection from the moment of start-up.

Specifications and standards: SAE: 10W-30, API: SM/SL/CF, ACEA: A3/B3

Recommended for MB 229.1; VW 501.01/505.00; RENAULT RN 0700;

FIAT; FORD; TOYOTA; HONDA; PEUGEOT

Item No.	Cap.	Pcs per pac
983.001	1L	12
983.004	4L	4
983,005	5L	4
983,020	20L	1
983,060	60L	1
983.208	208L	1
983.850	850KG	1

#### 10W-40



#### **VENOL SEMISYNTHETIC SN CF C3 10W40**

Semi-synthetic engine oil with ACTIVE POWER technology, designed for year-round use in modern gasoline and diesel engines. Recommended for engines equipped with DPF (diesel particulate filter) and TWC (three-way catalyst). The oil guarantees engine protection under all conditions and reduces fuel consumption. Recommended for vehicles meeting Euro 6 emission standards.

Specifications and standards: SAE: 10W-40, API: SN/CF, ACEA: C3

Recommended for: MB 229.31; MB 229.51; VW 502.00/505.00/505.01; RENAULT RN 0700/0710; GM DEXOS 2;

KIA; TOYOTA; FIAT; HONDA; HYUNDAI

Item No.	Cap.	Pcs per pack
262.001	1L	12
262,004	4L	4
262,005	5L	4
262,020	20L	1
262.060	60L	1
262.208	208L	1
262 850	850KG	1



#### **VENOL SEMISYNTHETIC SN CF 10W40**

Semi-synthetic engine oil with ACTIVE POWER technology, designed for year-round use in modern diesel and gasoline engines, including those powered by LPG. Intended for use under extreme operating conditions. Reduces the risk of valve wear and ensures optimal Jubrication and engine protection from the moment of start-up.

Specifications and standards: SAE: 10W-40, API: SN/CF, ACEA: A3/B4

Recommended for:
MB 229.1/229.3;
VW 501.01505.00;
PSA B71 2300;
RENAULTRN 0700/0710;
KIA; TOYOTA; FORD; FIAT; HONDA; HYUNDAI; GENERAL MOTORS

Item No.	Cap.	Pcs per pack
843.001	1L	12
843.004	4L	4
843.005	5L	4
843.020	20L	1
843.060	60L	1
843.208	208L	1
843.850	850KG	1



#### VENOL SEMISYNTHETIC MULTI PDG SM SL CG 4 CF 4 10W40

Semi-synthetic engine oil with ACTIVE POWER technology, designed for year-round use in modern gasoline and turbocharged or naturally aspirated diesel engines. Reduces the risk of valve wear, guarantees excellent lubrication, and ensures optimal engine performance regardless of the fuel type used: gasoline, diesel, or gas.

SAE: 10W-40, API: SM/CG, ACEA: A3/B4

Recommended for: MB 229.1/3; VW 502.00/505.00; RENAULT RN 0700/0710; PSAB71 2296; FIAT 9.55535-G2; FORD; HONDA; FIAT; SUZUKI; CHRYSLER

Item No.	Cap.	Pcs per pack
003.001	1L	12
003.004	4L	4
003.005	5L	4
003.020	20L	1
003.060	60L	1
003.208	208L	1
003.850	850KG	1



#### **VENOL SEMISYNTHETIC ACTIVE SG CE 10W40**

Multigrade mineral engine oil designed for passenger car and light commercial vehicle engines that are heavily used under severe urban driving conditions. The modern oil production technology and the use of appropriate functional additives guarantee proper lubrication, protection, and reliable engine performance.

Item No.	Cap.	Pcs per pac
220.001	1L	12
220,004	4L	4
220,005	5L	4
220,020	20L	1
220.060	60L	1
220.208	208L	1



#### **ENGINE OILS FOR PASSENGER CARS**



#### 15W-40



#### VENOL FORMULA MULTI PDG SM SLCG 4 CF 4 15W40

Mineral engine oil with ACTIVE POWER technology, designed for year-round use in modern gasoline engines and turbocharged diesel engines, including those with pump-injector systems. It facilitates cold engine starts and protects against excessive wear. Reduces fuel consumption and extends oil change intervals. The oil ensures optimal engine performance regardless of the fuel type used: gasoline, diesel, or gas.

## Specifications and standards: SAE: 15W-40, API: SM/CG, ACEA: A3/B4

Recommended for: MB 228.1/229.1; VW 501.01/505.00; VOLVO VDS-2; MAN 270; MAN 271; MAN M. 3275-1; MTU typ 2; MAC EO-L

Nr art.	Poj.	Szt. w opak
005.001	1L	12
005.004	4L	4
005.005	5L	4
005.020	20L	1
005.060	60L	1
005.208	208L	1
005 850	850KG	1



#### **VENOL STANDARD SFCD 15W40**

Multigrade mineral engine oil designed for passenger car and light commercial vehicle engines subjected to intensive use under severe urban driving conditions. Modern oil production technology and the use of appropriate functional additives ensure proper lubrication, protection, and reliable engine performance.

Specifications and standards: SAE: 15W-40, API: SF/CD, ACEA: A2/B2

Recommended for: ZF TE-ML 05A, ZF TE-ML 07A, ZF TE-ML 16 B/C/D, ZF TE-ML 17B, ZF TE-ML 19B, ZF TE-ML 21A; MIL-L-2105D; MAN 342 M-1; MB 235.0; VOITH 3.325-339; VOLVO 97310, VOLVO 97316

Item No.	Cap.	Pcs per pack
016.001	1L	12
016.004	4L	4
016.005	5L	4
016.020	20L	1
016.060	60L	1
016.208	208L	1
016.850	850KG	1

#### 20W-50



#### **VENOL SUPER SN 20W50**

Multigrade mineral engine oil designed for use in gasoline engines. The use of appropriate base oils and performance additives helps reduce friction, increase engine power, and extend oil change intervals.

Recommended for: MB 229.1/229.3; VW 501.01/505.00

Item No.	Cap.	Pcs per pac
826,001	1L	12
826.004	4L	4
826.005	5L	4
826.020	20L	1
826.060	60L	1
826.208	208L	1
826 850	850KG	- 1



#### **VENOL SUPER SM CF 20W50**

Multigrade mineral engine oil with ACTIVE POWER technology, designed for use in gasoline and diesel engines. Enhances engine cleanliness during operation and allows for extended oil change intervals. ACTIVE POWER technology helps reduce friction and achieve greater engine power.

Specifications and standards: SAE: 20W-50, API: SM/CF, ACEA: A3/B3

Recommended for: VW 501.01/505.00; GM B 0402098; MB 228.1/229.1; RENAULT RN 0700

Item No.	Cap.	Pcs per pack
921.001	1L	12
921.004	4L	4
921.005	5L	4
921.020	20L	1
921.060	60L	1
921.208	208L	1



#### **VENOL STANDARD ECONOMIC SFCD 20W50**

Multigrade mineral engine oil designed for turbocharged and naturally aspirated diesel engines under intensive use. Recommended for high-mileage engines in passenger cars, trucks, and buses. Modern production technology and carefully selected viscosity additives ensure reduced fuel and oil consumption

Item No.	Cap.	Pcs per pack
027.001	1L	12
027.004	4L	4
027.005	5L	4
027.020	20L	1
027.060	60L	1
027.208	208L	1
027.850	850KG	1







# WHY IT'S WORTH FLUSHING THE ENGINE WITH THE A.M.G. VENOL ENGINE FLUSH ADDITIVE





manual transmissions and axles

www.venol.de

#### OILS FOR MANUAL TRANSMISSIONS AND AXLES



#### **VENOL SEMISYNTHETIC GEAR GL 575W80**

A semi-synthetic gear oil designed for use in gearboxes, transmissions, and drive axles of passenger cars, trucks, and other vehicles where the manufacturer recommends an oil of similar quality. It ensures high load-carrying capacity and provides complete protection of friction components against excessive wear throughout the service life.

Specifications and standards: SAE: 75W80, API: GL-5

Recommended for: MIL-L-2105D; ZFTE-ML 02B/02D/08/17B; RENAULT; VOLVO 97307; MB 235.5; VW 650; EATON: IVECO

Item No.	Cap.	Pcs per paci
221.001	1L	12
221.005	5L	4
221.020	20L	1
221.060	60L	1
221,208	208L	1
224 050	DEONO	4



#### **VENOL SEMISYNTHETIC GEAR MTF GL 5 75W80**

Gear oil designed for use in moderately to heavily loaded transmissions, rear axles, and gear systems of passenger cars, trucks, buses, and other types of transport operating under severe service conditions, where the manufacturer recommends an oil of similar quality. The oil is formulated using synthetic technology, ensuring reliable transmission performance under all operating conditions.

Specifications and standards: SAE: 75W80, API: GL-5

Recommended for: ZFTE-ML01L,02L,16K; MTF94; MAN 341 typ E3, Z4; NISSAN MT-XZ; BMW MTF-LT-4; HONDAMTF III; MB 235.10; PSAB71 2230

Item No.	Cap.	Pcs per paci
416.001	1L	12
416.005	5L	4
416.020	20L	1
416.060	60L	1
416.208	208L	1
416,850	850KG	1



#### **VENOL SEMISYNTHETIC GEAR GL 5 75W85**

A semi-synthetic gear oil designed for use in gearboxes, transmissions, and drive axles of passenger cars, trucks, and other types of transport where the manufacturer recommends an oil of similar quality. It provides high load-carrying capability and ensures complete protection of friction components against excessive wear throughout the entire service life.

cifications and standards Specifications and sec. SAE: 75W85, API: GL-5

Recommended for: MB 235.7; GM 93740319; HYUNDAI 08950-0002 MITSUBISHI 3717610

Item No.	Cap.	Pcs per paci
850.001	1L	12
850.005	5L	4
850.020	20L	1
850.060	60L	1
850.208	208L	1
850.850	850KG	1



#### **VENOL SEMISYNTHETIC GEAR GL 5 75W90 LS**

A semi-synthetic gear oil designed for use in passenger cars, trucks, and other mechanical equipment equipped with limited slip differentials (LS - Limited Slip). It provides excellent protection against corrosion and wear. Due to its high load-carrying capacity, it is recommended for drive axles in vehicles where the manufacturer specifies the use of API GL-5 gear oil.

ZFTE-ML05C/D; ZFTE-ML07A; ZFTE-ML08;

Item No.	Cap.	Pcs per paci
836.001	1L	12
836.005	5L	4
836.020	20L	1
836.060	60L	1
836,208	208L	1
836.850	850KG	1



#### **VENOL SEMISYNTHETIC GEAR GL 575W90**

A semi-synthetic gear oil intended for use in gearboxes, transmissions, and drive axles of passenger cars, trucks, and other vehicles where the manufacturer recommends an oil of similar quality class. It provides high load-carrying capacity and full protection of friction components against excessive wear during operation.

Specifications and standards SAE: 75W90, API: GL-5

Recommended for: MIL-L-2105D

Item No.	Cap.	Pcs per paci
034.001	1L	12
034.005	5L	4
034.020	20L	1
034.060	60L	1
034.208	208L	1
034,850	850KG	1



#### **VENOL GEAR GL 5 80W90 LS**

Gear oil intended for use in passenger cars, trucks, and other mechanical equipment equipped with limited slip differentials (LS – Limited Slip). It guarantees excellent corrosion and wear protection. Due to its high load-carrying capacity, it is recommended for drive axles in vehicles where the manufacturer specifies API GL-5 gear oil.

Specifications and sta SAE: 80W90, API: GL-5

ZFTE-ML05A, ZFTE-ML07A, ZFTE-ML16 B/C/D, ZFTE-ML17B, ZFTE-ML19B, ZFTE-ML21A; MIL-L-2105D: MAN 342 M-1: MB 235.0; VOITH 3.325-339; VOLVO 97310, VOLVO 97316

Item No.	Cap.	Pcs per pack
439.001	1L	12
439.005	5L	4
439.020	20L	1
439.060	60L	1
439.208	208L	1
420.050	0EUNG	- 1



#### **VENOLGEAR GL 5 80W90**

A mineral gear oil designed for use in heavily loaded transmissions, rear axles, and gear systems of passenger cars, trucks, buses, and other vehicles operating under severe conditions, where the manufacturer recommends an oil of similar quality class. It provides very good lubricating and anti-rust properties, high oxidation resistance, and excellent load-carrying capacity.

Specifications and standards: SAE: 80W-90, API: GL-5

MIL-L-2105D; ZF TE-ML 16B, ZF TE-ML 17B, ZF TE-ML 19B, ZF TE-ML 21A; VOLVO 97310; RENAULT; DAF; ZETOR

Item No.	Cap.	Pcs per pack
036.001	1L	12
036.005	5L	4
036.020	20L	1
036.060	60L	1
036.208	208L	1
036,850	850KG	1



#### **OILS FOR MANUAL TRANSMISSIONS AND AXLES**





#### VENOL GEAR GL 585W90

Mineral gear oil designed for use in heavily loaded gearboxes, rear axles, and transmissions of passenger cars, trucks, buses, and other vehicles operating under severe conditions, where the manufacturer recommends an oil of similar quality class. It provides excellent lubricating and anti-rust properties, high oxidation resistance, and strong load-carrying capacity.

Specifications and standards: SAE: 85W90, API: GL-5

Recommended for: MIL-L-2105D; ZFTE-ML 16B, ZFTE-ML 17B, ZFTE-ML 19B, ZFTE-ML 21A; VOLVO 97310; RENAULT; DAE: ZETOR

Item No.	Cap.	Pcs per pack
161.001	1L	12
161.005	5L	4
161.020	20L	1
161.060	60L	1
161.208	208L	1
161 050	OEUNG	4



#### VENOL GEAR GL 5 85W140

Mineral gear oil designed for use in heavily loaded gearboxes, rear axles, and other transmissions of trucks and agricultural tractors. It is also recommended for use in all machinery and equipment where the manufacturer specifies an oil of similar quality class. The oil provides excellent lubricating and anti-rust properties, high oxidation resistance, and strong load-carrying capacity.

Specifications and standards: SAE: 85W140, API: GL-5

Recommended for: HARVESTER HMS B22-003

Item No.	Cap.	Pcs per pad
035.001	1L	12
035.005	5L	4
035.020	20L	1
035.060	60L	1
035.208	208L	1
035.850	850KG	



#### VENOL GEAR MTF GL 475W80

Gear oil intended for use in medium to heavily loaded transmissions, rear axles, and gearboxes of passenger cars, trucks, buses, and other vehicles operating under severe conditions, where the manufacturer recommends an oil of similar quality class. The oil is formulated using synthetic technology, ensuring reliable transmission performance under all operating conditions.

Specifications and standards: SAE: 75W80, API: GL-4

rcommenaea for: TE-ML 01L, ZF TE-ML 02L, ZF TE-ML 16K; MTF 94; MTF 94; MAN 341 typ E3, Z4; NISSAN MT-XZ; BMW MTF LT-4; HONDAMTF III; MB 235.10; PSAB71 2230

Item No.	Cap.	Pcs per pack
419.001	1L	12
419.005	5L	4
419.020	20L	1
419.060	60L	1
419.208	208L	1
419 850	850KG	1



#### VENOL SEMISYNTHETIC GEAR GL 475W80

A semi-synthetic gear oil designed for use in gearboxes, transmissions, and drive axles of passenger cars, trucks, and other vehicles where the manufacturer recommends oil of a similar quality grade. It provides high load-carrying capacity and  $full \, protection \, of \, friction \, components \, against \, excessive \, wear \, during \, operation.$ 

Specifications and standards SAE: 75W80, API: GL-4

ommended for: MIL-L-2105D; ZF TE-ML02B/02D/08/17B; RENAULT; VOLVO 97307; MB 235.5; VW G50; DAF; EATON; IVECO

Item No.	Cap.	Pcs per pack
979.001	1L	12
979.005	5L	4
979.020	20L	1
979.060	60L	1
979.208	208L	1
979,850	850KG	1



#### **VENOL SEMISYNTHETIC GEAR GL 475W90**

A semi-synthetic gear oil designed for use in gearboxes, transmissions, and drive axles of passenger cars, trucks, and other vehicles where the manufacturer recommends an oil of similar quality class. It provides high load-carrying capacity and full protection of friction components against excessive wear during operation.

Recommended for: MIL-L-2105D

,	tem No.	Cap.	Pcs per pack
- (	029.001	1L	12
- (	029.005	5L	4
- 1	029.020	20L	1
- (	029.060	60L	1
- 1	029.208	208L	1
- (	029.850	850KG	1



#### **VENOL GEAR GL 485W140**

A mineral gear oil designed for use in heavily loaded gearboxes, rear axles, and other transmissions of trucks and agricultural tractors. It is also recommended for all machinery and equipment where the manufacturer specifies the use of an oil of similar quality class. The oil provides excellent lubricating and anti-rust properties, high oxidation resistance, and superior load-carrying capacity.

Recommended for: HARVESTER HMS B22-003

Item No.	Сар.	Pcs per pack
831.001	1L	12
831.005	5L	4
831.020	20L	1
831.060	60L	1
035,208	208L	1
005.050	0501/0	



#### **VENOL GEAR GL 480W**

A single-season oil designed for use in medium-loaded gearboxes, including hypoid gears. Mainly used in agricultural machinery. Produced based on mineral bases and selected synthetic bases.

Specifications and standards: SAE: 80W, API: GL-4

ZETE-MI 16A ZF TE-ML 19A; MB 235.1; MAN 341 typ E1

Item No.	Cap.	Pcs per pack
032.001	1L	12
032.005	5L	4
032.020	20L	1
032.060	60L	1
032,208	208L	1
022 050	0EUKC	4







## **OILS FOR MANUAL TRANSMISSIONS AND AXLES**



#### **VENOL GEAR GL 480W90**

Mineral gear oil designed for use in heavily loaded gearboxes, rear axles, and other transmissions of passenger cars, trucks, buses, and other vehicles operating under severe service conditions, where the manufacturer recommends an oil of a similar quality class. It offers excellent lubricating and anti-corrosion properties, high oxidation resistance, and outstanding load-carrying capacity.

Specifications and standards: SAE: 80W90, API: GL-4

Recommended for MIL-L-2105 D

Item No.	Cap.	Pcs per pac
030.001	1L	12
030.005	5L	4
030.020	20L	1
030.060	60L	1
030.208	208L	1
020.050	DEOMO	4



#### VENOLGEAR GL 485W90

Mineral gear oil designed for use in heavily loaded gearboxes, rear axles, and other transmissions of passenger cars, trucks, buses, and other means of transport operating under severe service conditions, where the manufacturer recommends an oil of a similar quality class. It provides excellent lubricating properties, corrosion protection, high oxidation resistance, and outstanding load-carrying capacity.

Specifications and standards: SAE: 85W90, API: GL-4

Recommended for MIL-L-2105 D; MAN 342 M1; VOITH 3.325-339

Item No.	Cap.	Pcs per pac
160.001	1L	12
160.005	5L	4
160.020	20L	1
160.060	60L	1
160,208	208L	1
160.850	850KG	- 1



#### **VENOL GEAR GL1SAE 90**

Mineral gear oil intended for use in gearboxes and power transmission systems in vehicles where the manufacturer recommends an oil of a similar quality class. The oil offers excellent lubricating properties, protects against corrosion, seizing, aging of components, and wear. It does not contain EP (Extreme Pressure) additives.

Specifications and standards: SAE: 90, API: GL-1

Item No.	Cap.	Pcs per pack
220.001	1L	12
220.005	5L	4
220.020	20L	1
220.060	60L	1
220,208	208L	1
220.050	DEONO	4





## **OILS FOR AUTOMATIC TRANSMISSIONS**



#### **VENOLATFA**

Mineral oil designed for hydraulic systems operating under severe conditions. It is used in power steering mechanisms in motor vehicles as well as in automatic transmissions. The oil contains an additive package that improves viscosity-temperature characteristics, lubricating properties, and provides anti-foam, anti-corrosion, and antioxidant protection.

Specifications and standards: ISO VG: 32-46

Item No.	Cap.	Pcs per pac
632.001	1L	12
632.005	5L	4
632.020	20L	1
632.060	60L	1
632.208	208L	1
622.050	0EUKC	4



#### **VENOLATFII DEX II RED**

Hydraulic and transmission oil intended for use in automatic transmissions, hydraulic power steering systems, and other hydraulic mechanisms in passenger cars and trucks, where the manufacturer recommends the use of Dexron III type oil.

Recommended for:

GM DEXRON II-EJI-D;

MB 236.2/67;

MAN 339 TYP ZI/TYP V1;

ZFTE-ML 04D, ZF TE-ML 11A, ZF TE-ML 14A;

MERCON SP;

ALLISON C-4;

BMW ATF 2;

VOLVO 97325;

FORD ESPAM2C166-H/ESP-M2C138-CJ/WSS-M2C938-A;

OPEL 19 40 700/19 40 707; PSAS712102;

CATTO-2; VOITH 6607

Item No.	Cap.	Pcs per pack
037.001	1L	12
037.005	5L	4
037.020	20L	1
037.060	60L	1
037.208	208L	1
037 850	850KG	1



#### **VENOLATFIII DEX III RED**

Hydraulic and transmission oil designed for use in automatic transmissions, hydraulic power steering systems, and other hydraulic mechanisms of passenger cars and trucks, where the manufacturer recommends the use of Dexron III/Mercon type oil.

RECOMMENDED TO:

GM DEXRON 139-CJ/166-H;

ALLISON C-4, MB 236, 1/5/6/9/11;

VOITH G 607/H55,6335,34;

ZF TEM. 03D/04D/098/11/14B/17C;

CRYSLERATF -3/1-4;

FORD MZC924-AM/2C922-A1,

GM 9986195; TOYOTA TYPE T/T-I/Y-II/T-I/Y;

MAN 338F7/I/ZT; BMW 83 22 7542 290/83 22 0 402 413;

HONDA ATF Z-I; HYUNDA IS PILIES PV;

WG 055025062 9990; ASIN WARNER

Item No.	Cap.	Pcs per pack
038.001	1L	12
038.005	5L	4
038.020	20L	1
038.060	60L	1
038.208	208L	1
038.850	850KG	1



#### **VENOLATFIII DEX III YELLOW**

Hydraulic and transmission oil intended for use in automatic transmissions, hydraulic power steering systems, and other hydraulic mechanisms of passenger cars and trucks where the manufacturer recommends the use of Dexron III / Mercon type oil.

Recommended for:
GM DEXRONIII:
MERCON M2C 138-CJ/166-H;
ALLSON C-4: MB 236. 136/69/10;
VOITH G607/165-538-534;
ZF TEM. U300/04D/098/11/M148/17C;
CHRYSLER ATF 4:/4-;
FORD M2C/324-AM/2C/322-A1;
GM 9896/195; TOYOTATYPE-TT-HIV-III/T-IV;
MAN 339F/VITZT; BMW 83 2Z 75 7542 290/83 22 0 402 413;
HONDA ATF-Z-1; HYUNDAI SPIIUSP IV;
WG 0550/50/850 990: AISINWARNER

Item No.	Cap.	Pcs per pack
230.001	1L	12
230.005	5L	4
230.020	20L	1
230.060	60L	1
230.208	208L	1
230.850	850KG	1



#### **VENOLATFIV RED**

Transmission oil intended for use in automatic transmissions. It provides longer service life compared to other ATF Dexron III fluids. Reduces transmission wear at low temperatures, ensuring longer durability of individual components and the transmission itself.

Recommended for:
GMDEXRON III H;
FORD MERCONLV;
MB 236.41;
HYUNDAJIKIASP-IV, SP-III, SP-IIII, SP-IV/SPH-IV;
TOYOTA ATF TYPE T-III, T-IV;
ZF M1375;
NISSAN/INF INITI MATIC S, K, J, D;
ALLISON C-4;
HONDA ATF Z1; DAIMLER CHRYSLER ATF +3, +4;
VW/AUDIG 055 540 AZ; BMW 83 22 9 407 859;
MITSUBISHIDIAMOND ATF SP III, SP III; JALOS JASO 1A

Item No.	Cap.	Pcs per pack
141.001	1L	12
141.005	5L	4
141.020	20L	1
141.060	60L	1
141.208	208L	1
141.850	850KG	1



#### **VENOLATFIV YELLOW**

Transmission oil designed for use in automatic transmissions. It offers a longer service life compared to other ATF Dexron III fluids. Reduces transmission wear at low temperatures, ensuring extended durability of individual components and the transmission as a whole.

Recommended for:
GM DEXRONIII H;
FORD MERCON LY;
MB 236.41;
HYUNDAI/KIASP-IV, SP-III, SP-III, SP-IV/SPH-IV;
TOYOTA ATF TYPE T-III, T-IV;
ZF M1375;
NISSANINFINITI MATIC S, K, J, D;
ALLISON C-4;
HONDA ATF 21; DAIMLER CHRY SLERATF + 3, +4;
VW/AUDIG 055 540 A2; BMW 83 22 9 407 858/83 22 9 407 859;
MTSUBISHIDIAMOND ATF SP II, SP III; JALOS JASO 1A

Item No.	Сар.	Pcs per pack
244.001	1L	12
244.005	5L	4
244.020	20L	1
244.060	60L	1
244.208	208L	1
244.850	850KG	1



#### **VENOLATFULV 10S RED**

Synthetic transmission oil designed for automatic transmissions (ATF) with ultra-low viscosity (ULV), developed based on PAO and oils derived from the hydrocracking process. Recommended for use in the latest 8- and 10-speed automatic transmissions from brands such as FORD and GM. It is especially suitable where the Ford WSS-M2C949-A specification is required. This oil is recommended for the following automatic transmissions: Ford 8-speed: 8F24, 8F35, 8F40, 8F57; Ford 10-speed: 10R60, 10R80-MHT, 10R80, 10R140; GM 10-speed: 10L80, MF6, 10L90 MGL, 10L100 (Allison) MGM/MGU. Flushing the transmission with Venol ATF ULV 10S oil before filling is recommended. Follow the manufacturer's recommendations.

Cap.	Pcs per pack
1L	12
5L	4
20L	1
60L	1
208L	1
850KG	1
	1L 5L 20L 60L 208L





#### **OILS FOR AUTOMATIC TRANSMISSIONS**



#### **VENOLATF VI DEX VI RED**

Transmission oil intended for use in 6-speed automatic transmissions of passenger cars and trucks, where the manufacturer recommends the use of Dexron VI type oil. It exhibits excellent lubricating properties, high thermal stability, and oxidation resistance.

Recommended fo GM DEXRON VIG; FORD MERCON LV; MB 236.14, MB 236.41; HYUNDAI/KIA SP-IV, SP-III, SP-IVI, SPH-IV; TOYOTA ATF TYPE WS, T-III, T-IV; TOYOLA AIFTERWAS, I-M, I-MY, ZFM 375;
NISSANINFINITI MATICS, K, J, D; ALLISON C-4;
HONDA ATE 71; DAMLER CHRYS LERATF +3,+4;
WWAUDIG 055 540 A2; BMW 83 22 9 407 859;
MITSUBISHI DIAMOND ATF SP II, SP III;
JALOS JASO 1A; ACURADW1, ATF Z1

Item No.	Cap.	Pcs per pack
142.001	1L	12
142.005	5L	4
142.020	20L	1
142.060	60L	1
142.208	208L	1
142.850	850KG	1



#### **VENOLATF VI DEX VI YELLOW**

Transmission oil designed for use in 6-speed automatic transmissions of passenger cars and trucks, where the manufacturer recommends Dexron VI type oil. It demonstrates excellent lubricating properties, high thermal stability, and oxidation resistance.

GM DEXRON VIG FORD MERCON LV MB 236 14 MB 236 41 MD 230, 14, MD 230, 41, HYUNDAI/KIASP-IV, SP-II, SP-III, SP-IV/ TOYOTAATE TYPE WS, T-III, T-IV; ZF M1375; NISSAN/INFINITI MATIC S, K, J, D; ZFM1375; NISSANINFINITI MATIC S, K, J, D; ALLSON C-4, IFONDA ATF ZT; DAIMLER CHRYSLERATF +3, +4; VWAUDIG G95540 A2; BMW 83 22 9 407 859/83 22 9 407 859; MITSUBISH IDAMOND ATF SPIL, SPIII; JALOS JASO 1A; ACURA DW1, ATF Z1

Item No.	Сар.	Pcs per pack
241.001	1L	12
241.005	5L	4
241.020	20L	1
241.060	60L	1
241.208	208L	1
241,850	850KG	1



#### **VENOLATE DCT DSG TRANSMISSION**

Synthetic technology transmission oil designed for dual-clutch transmissions from leading manufacturers: VW/Audi, Ford, Volvo, Chrysler, Dodge, Mitsubishi, and others. Recommended for dual-clutch transmissions DQ-250 (02E) and DQ-500 (0BT) in accordance with VW standards G 052 182, DL-501 (0B5), and VW Part-No. G 052 529 for VW, Audi, Seat, and Skoda. It guarantees optimal lubricating properties under all operating conditions, even under extremely high loads during both winter and summer periods.

Recommended for: VW G 052 182 A2; VW G 052 529 A2; FORD 1490763, 1490761; FORD WSS-M2C936-A FORD USA XT-11-QDC, FORD WSD-M2C200-D2; CHRYSLER 68044345 EA; VOLVO 1161838, 1161839; MITSUBISHI MZ320065, MITSUBISHI Dia-Queen SSTF-I; BOT 341: PEUGEOT/CITROEN 9734.S2 for DCSG (PEUGEOT 4007, CITROEN C-CROSSER); FIAT 9.55550-MZ6 for TCT (Twin Clutch Transmission)

Item No.	Cap.	Pcs per pack
995.001	1L	12
995.005	5L	4
995.020	20L	1
995.060	60L	1
995.208	208L	1
995.850	850KG	1



#### **VENOLATE CVT TRANSMISSION**

Transmission oil designed for automatic continuously variable transmissions (CVT). It provides exceptional protection even under the most demanding operating conditions and meets all requirements for CVT transmissions. Ensures excellent wear protection in all operating conditions. ATF CVT oil is not recommended as a substitute for other types VW/AUDITL 52180/G 052180; FORD CVT 23/CVT 30; MERCON C; HONDAHMMF; MINI COOPER EZL 799; SUZUKI TC/NS-2/CVT GREEN 1; TOYOTATC; NISSAN NS-1, NS-2, NS-3; HUUNDAI GENUINE CVTF; HYUNDAI/KIA SP-III;
DODGE/JEEP NS-2/CVTF +4; GM/SATURN DEX-CVT;
MITSUBISHI CVTF-J1/SP-III; SUBARU NS-2/LINEARTRONIC CVTF

Item No.	Cap.	Pcs per pack
923.001	1L	12
923.005	5L	4
923.020	20L	1
923.060	60L	1
923,208	208L	1
923,850	850KG	1



#### **VENOLATE 8 HP**

Transmission oil intended for use in modern automatic transmissions with 8 speeds or fewer. It increases transmission lifespan by reducing friction. Provides thermal stability and excellent resistance to deposit formation. The oil has exceptionally good flow properties at low temperatures. Not intended for use in CVT and DCT/DSG transmissions.

Recommended for:
ZF Lifeguardfluid 8 (8671 090 312);
ZF Lifeguardfluid 9 (AA01.500.001);
VVMAudi G 0500 162 AV(22/A6, G 0555 162 (A2,A6);
VVMAudi G 0505 540 (A2);
BMW L12108 (83 22 2 152 426), 83 22 2 305 397;
BMW 12108 26 397 20 (ATF3+);
Land Rover LR 023288/232289; Chrysler 68157995AA; Honda Type 3.1; Jaguar 02JDE 26444; Mopar 68157995AA

Item No.	Cap.	Pcs per pack
722.001	1L	12
722.005	5L	4
722.020	20L	1
722.060	60L	1
722,208	208L	1
722.850	850KG	1



#### **VENOLATFZF8&9SPEED**

Transmission oil designed for use in modern automatic transmissions with 8 speeds or fewer. It increases transmission lifespan by reducing friction. Provides thermal stability and excellent resistance to deposit formation. The oil has exceptionally good flow properties at low temperatures. Not intended for use in CVT and DCT/DSG transmissions.

Recommended for:
ZF Lifeguardfluid 8 (S671 090 312), ZF Lifeguardfluid 9 (A401.500.001);
WF Lifeguardfluid 8 (S671 090 312), ZF Lifeguardfluid 9 (A401.500.001);
WF Audi G 160 162 A1/A2/A6, G 055 162 (A2.A6), G 055 540 (A2);
BMW L12108, 83 22 2 152 426, 83 22 2 305 397, 83 22 2 289 720;
Porsche PN 995 300 5400 0ATF Type 3.1;
MB 236.14, MB 236.12;
Land Rover LR 023288 (232289;
Jaguar 02.1DE 26444, Fluid 8432;
Chrysler 68 157995AA; Nissan Matic S, P/N 999MP-MTS00P;
Toyota WFS 3324, ATF WS, ATF FZ; Suzuki Matic S;
Honda 0820-9 470; Volov Pn 31 256 774, 31 256 775;
Mopar 68 157995AA; AISIN JWS 3324 ATF, ATF-0WS;


Item No.	Cap.	Pcs per pac
722,001	1L	12
722,005	5L	4
722,020	20L	1
722,060	60L	1
722.208	208L	1
722.850	850KG	1







# HOW TO CLEAN THE FUEL INJECTION SYSTEM

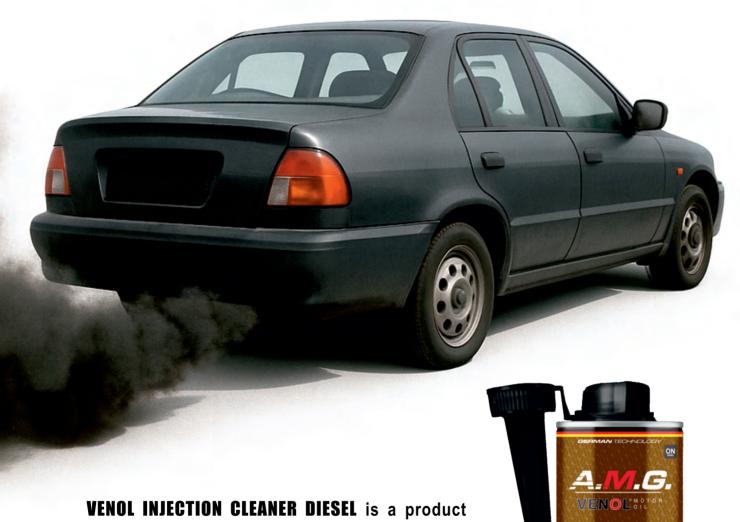

**VENOL INJECTION CLEANER DIESEL** is a product designed for effective cleaning of fuel injection systems in diesel engines. The liquid removes carbon deposits from injector nozzles, improving fuel atomization and combustion conditions. Regular use reduces fuel consumption, limits smoke emissions, quiets engine operation, and extends the lifespan of the injection system. The product is suitable for all types of injection systems: injection pumps, unit injectors, and Common Rail injectors.

WWW.VENOL.DE



635





## **MOTORCYCLE OILS**



#### VENOL4T5W40SN

Engine oil designed for four-stroke, heavily loaded motorcycle gasoline engines operating under extreme conditions. It guarantees continuous lubrication under the toughest working conditions, such as low temperatures (cold start) and high temperatures with the engine running at maximum heat. Provides full engine protection during high-performance sport riding.

Specifications and standards: SAE: 5W-40, API: SN, ACEA: A3

Recommended for

Item No.	Cap.	Pcs per pac
278.001	1L	12
278.005	5L	4
278.020	20L	1
278.060	60L	1
278,208	208L	1
070.050	0501/0	



#### **VENOL SYNTHESIS 4T SN 10W40**

Engine oil designed for four-stroke, heavily loaded motorcycle gasoline engines operating under extreme conditions. It ensures continuous lubrication under the toughest working conditions, such as low temperatures (cold start) and high temperatures with the engine running at full heat. Provides full engine protection during high-performance sport riding.

Specifications and standards: SAE: 10W-40, API: SN, ACEA: A3

Recommended for: JASO MA/MA-2

Item No.	Cap.	Pcs per pac
373.001	1L	12
373.005	5L	4
373.020	20L	1
373.060	60L	1
373.208	208L	1
373.850	850KG	- 1



#### **VENOL SYNTHESIS 4T SN 10W50**

Engine oil designed for four-stroke, heavily loaded motorcycle gasoline engines operating under extreme conditions. It guarantees continuous lubrication in the most demanding conditions, including low temperatures (cold starts) and high temperatures with the engine running at maximum heat. Provides full engine protection during high-performance sport riding.

Specifications and standards: SAE: 10W-50, API: SN

Recommended for: JASO MA/MA-2

Item No.	Cap.	Pcs per pack
828.001	1L	12
828.005	5L	4
828.020	20L	1
828.060	60L	1
828,208	208L	1
828 850	850KG	- 1



#### **VENOL SEMISYNTHETIC 4T SM SL 10W40**

Semi-synthetic engine oil designed for four-stroke motorcycle and motorboat engines. It guarantees low volatility and quick engine start-up. Reduces engine wear at both low and high temperatures, which helps extend engine life and significantly reduces fuel consumption.

Specifications and standards: SAE: 10W-40, API: SM/SL, ACEA: A3

Recommended for: JASO MA/MA-2

Item No.	Cap.	Pcs per pack
118.0008	0,8L	12
118.001	1L	12
118.005	5L	4
118.020	20L	1
118.060	60L	1
118,208	208L	1
118,850	850KG	1



#### VENOL4TSF15W40

Mineral engine oil designed for four-stroke motorcycle engines. Recommended for older generation motorcycles with a single lubrication system. Ensures reliable starting and full protection between oil changes. Provides excellent lubrication and protection during motorcycle operation.

Specifications and standards:

Recommended for: JASO MA/MA-2

Item No.	Cap.	Pcs per pack
333.0008	0,8L	12
333.001	1L	12
333.005	5L	4
333.020	20L	1
333.060	60L	1
333,208	208L	1
333,850	850KG	1



#### VENOL 4T SN SM 20W50

Mineral engine oil designed for four-stroke motorcycle engines.Recommended for motorcycles with a single lubrication system or single oil bath. Performs excellently in engines subjected to high thermal loads and in demanding gearboxes. Reduces deposit formation during operation at extremely high temperatures. Especially recommended for lubricating large-displacement four-stroke V-Twin engines used in American and Japanese motorcycles.

Specifications and standards SAE: 20W-50, API: SN/SM

Recommended for JASO MA/MA-2

Item No.	Cap.	Pcs per paci
827.0008	0,8L	12
827.001	1L	12
827.005	5L	4
827.020	20L	1
827.060	60L	1
827.208	208L	1
827,850	850KG	1



#### VENOL4TSL20W50

Mineral engine oil designed for four-stroke motorcycle engines. Recommended for motorcycles with a single lubrication system/wet sump. It performs exceptionally well in engines under high thermal stress and in demanding gearboxes. It ensures reduced deposit formation during operation at extremely high temperatures. Especially recommended for lubricating high-displacement four-stroke engines used in American and Japanese motorcycles. Reliable for lubricating motorcycle gearboxes with either wet or dry clutches.

Specifications and standards: SAE: 20W-50, API: SL

Recommended for JASO MA/MA-2

Item No.	Cap.	Pcs per pack
448.0008	0,8L	12
448.001	1L	12
448.005	5L	4
448.020	20L	1
448.060	60L	1
448.208	208L	1
448.850	850KG	1







#### VENOL4TSF20W50

Mineral engine oil designed for four-stroke motorcycle engines. Recommended for older-generation motorcycles with a single lubrication system. It guarantees reliable starting and full protection between oil changes. Provides excellent lubrication and protection for motorcycles during operation.

Specifications and standards: SAE: 20W-50, API: SF

Recommended fo

Item No.	Cap.	Pcs per pa
335.0008	0,8L	12
335.001	1L	12
335.005	5L	4
335.020	20L	1
335.060	60L	1
335,208	208L	1
225.050	OFOICO	4



#### **VENOL SEMISYNTHETIC 2TTC WITH DISPENSER**

Semi-synthetic engine oil designed for two-stroke engines with a pre-mix system, as well as for high-performance engines with a cylinder displacement from 20 cm³ to 500 cm³. Suitable for use in the engines of motorcycles, cars, snowmobiles, personal watercraft, and chainsaws. The oil can be added directly to the fuel tank.

Specifications and standards SAF: 30 API: TC

Item No.	Сар.	Pcs per pa



#### **VENOLSEMISYNTHETIC 2TTC**

Semi-synthetic engine oil designed for two-stroke engines with a pre-mix system, as well as for high-performance engines with a cylinder displacement ranging from 20 cm³ to 500 cm³. Suitable for use in the engines of motorcycles, cars, snowmobiles, personal watercraft, and chainsaws. The oil can be mixed directly into the fuel tank.

Specifications and standards SAF: 30 API: TC

Item No.	Cap.	Pcs per pack
041.001	1L	12
041.005	5L	4
041.020	20L	1
041.060	60L	1
041.208	208L	1
041.850	850KG	1



#### **VENOLMIX2TTC**

Mineral engine oil designed for two-stroke engines with a pre-mix system. Suitable for use in the engines of motorcycles, cars, snowmobiles, personal watercraft, and chainsaws. The oil can be mixed directly into the fuel tank.

Specifications and standards:

Item No.	Cap.	Pcs per pack
040.001	1L	12
040.005	5L	4
040.020	20L	1
040.060	60L	1
040.208	208L	1
040.850	850KG	1



## VENOL SYNTHESIS SCOOTER 4T SN 10W30 JASO MB

Synthetic engine oil designed for scooters and motorcycles equipped with four-stroke engines without a wet clutch. It improves cold engine start-up and extends engine life. Provides excellent protection against overheating, which is especially important during urban riding with frequent start-stop intervals. Offers outstanding anti-corrosion antioxidant properties, while keeping the engine clean. The oil ensures excellent performance and fuel efficiency, contributing to reduced  ${\rm CO_2}$  emissions into the atmosphere.

SAE: 10W/30, API: SN

Recommended for:

Item No.	Сар.	Pcs per pa
634 001	0.81	12



#### VENOL SYNTHESIS SCOOTER 4T SN 10W40 JASO MB

Synthetic technology engine oil designed for scooters equipped with four-stroke gasoline engines. Especially recommended for scooters with a dry clutch and motorcycles with an automatic continuously variable transmission (CVT). Provides engine protection against overheating in demanding urban traffic conditions, where engine cooling is limited. Keeps the engine clean and is characterized by excellent anti-corrosion and antioxidant properties.

Specifications and standards SAE: 10W-40, API: SN

Recommended fo JASO MB

Item No.	Cap.	Pcs per pac
267.0008	0,8L	12



#### VENOL4TTUKTUKLPG/CNG 20W50

Multigrade mineral oil designed for engines powered by compressed natural gas (CNG) or liquefied petroleum gas (LPG). Manufactured using low-ash additive technology with a reduced sulfate ash content. The oil ensures maximum engine performance and guarantees smooth operation under all conditions.

Specifications and standards: SAE: 20W-50, API: SN/CF, ACEA: C3

Item No.	Сар.	Pcs per pa
932.002	2L	6





## **Production**

#### Container

We manufacture high-density polyethylene (HDPE) packaging using blow extrusion technology. Our HDPE containers are produced for our own needs as well as for commercial sale. We offer packaging in the following capacities: 0.5L, 1L, 4L, 5L, 7L, 10L, and 20L.





#### **Blending plant**

The oil production process takes place in a modern, computerized blending facility equipped with seven mixers featuring integrated heating, dosing, and filtration systems. Raw materials are dosed, and finished products are transferred from the blending area using a PIGGING system. The PIGGING system operates using pistons inside the pipeline, driven by compressed air. This ensures both production repeatability and cleanliness, as the pipelines are emptied and cleaned after each operation. This guarantees accurate dosing of raw materials and prevents cross-contamination between different products. The entire blending process is monitored by a team of qualified personnel.

## **Packaging**

The packaging and bottling of our products are carried out on modern, automated, and robotized filling and packaging lines. We operate three fully automated, high-capacity filling and packaging lines, as well as three semi-automated lines. Our staff ensures that all products are packed in an aesthetic, durable, and clearly labeled manner. Products leaving our facility are sealed with induction cap seals for maximum safety. The entire production process is supervised by a dedicated Production Management System (PMS).



#### Warehouse

We have several warehouses with a total capacity of 4,500 pallet spaces. Different warehouse sections utilize various systems to support warehouse operations, such as drive-in rack systems, radio-controlled shuttle rack systems (radioshuttle), and mobile rack systems. All these systems are integrated with a Warehouse Management System (WMS), ensuring proper storage of products and full traceability of their locations. We specialize in loading sea containers, which requires specialized solutions and precision in arranging goods within the container.



## TRUCK ENGINE OILS



#### **VENOLTRUCK BLUECK 45W30**

Engine oil (MID ASH) intended mainly for Diesel engines. It provides excellent performance in modern, highly loaded engines with low emissions equipped with exhaust gas recirculation (EGR) and systems such as (DPF) and with oxidation catalysts for Diesel engines (DOC). It is fully compatible with older generation engines and can be used with the same success in standard engines equipped with older exhaust gas treatment solutions. Recommended for trucks, working machines, mining industry machinery, construction, aggregate mining and agriculture.

Specifications and standards: SAE: 5W-30, API: CK-4, ACEA: E9/ E7

VOLVO VDS-4.5; RENAULT RLD-4; MAN M. 3775; MB 228.31; DEUTZ DQC-III-10 LA; CATERPILLAR ECF-3 JASO DH-2; MACK EO-S 4 5: CLIMMINS CES 20086 DETROIT DIESEL DFS 93K222; MTU Oil Category 2,1

Item No.	Cap.	Pcs in packaç
255.005	5L	4
255.020	20L	1
255.060	60L	1
255,208	208L	1
255.050	DEOMO	4



#### VENOLTRUCK BLUE CK 45W30 E8/E11

A modern, multi-season engine oil formulated using synthetic technology. Designed for highly loaded turbocharged and non-turbocharged diesel engines equipped with the latest exhaust aftertreatment systems such as EGR, DPF, and DOC.

The advanced MidSAPS oil technology significantly extends engine lifespan under extremely demanding operating conditions. t features excellent low-temperature properties, ensuring outstanding performance and complete engine protection against wear and corrosion in all working conditions. It reduces friction, improves fuel efficiency, and extends oil change intervals.

Specifications and standards: SAE: 5W-30, API: CK-4/CJ-4/SN, ACEA: E6/E7/E8/E9/E11

Recommended for:
VOLVO VDS-4.5;
RENAULT RLD-3;
MAN M3775;
MAN M3775;
DEUTZ DQC-IV-18 LA;
CAT ECF-3;
JASO DH-2; MACK EO-S 4.5; CUMMINS CES 20086; DETROIT DIESEL DFS 93K222; MTU Typ 3.1; SCANIALDF-4

738.060 738,208 738 850 850KG

Item No. 738 005

738.020



#### VENOL TRUCK MAX CJ45W30 E6

The latest generation oil, specially developed for modern diesel engines that meet the most stringent Euro V and EURO VI emission standards. Ensure the protection and viability of components of the exhaust system such as catalytic converters and particulate filters. It guarantees operational stability in extreme temperatures. Provides engine protection against wear and corrosion, and extended drain intervals. It is recommended for diesel engines equipped with exhaust gas recirculation systems with and without particulate filters and for engines with a selective catalyst reducing nitrogen oxides in exhaust gases.

Specifications and standards: SAE: 5W-30, API: CJ-4, ACEA: E6/E9

Recommended for:
MB 228.51; MB 228.231;
MAN M3477, M3677;
VOLVO VDS-4;
MACK EO-OPREMIUM PLUS 07;
RENAULT VIRLD -3/RXD;
CUMMINS CES 20078, 20081;
DETROIT DIESEL EXTRANET 93K218;
DEUTZ DQC IV-10LA; JASO DH-2; MTUTYPE 3.1

Item No.	Cap.	Pcs in packag
265.005	5L	4
265.020	20L	1
265.060	60L	1
265.208	208L	1
265.850	850KG	1



#### VENOLTRUCK MAX CJ45W30 E9

Oil VENOL Synthesis Truck Max CJ 4 5W30 is produced on the basis of specially selected synthetic and mineral oils, using the latest generation MID SAPS type additive package. The use of such highly advanced technology effectively reduces the friction between cooperating elements, ensures a decrease in fuel consumption and an increase in engine power. Very good low temperature properties guarantee optimal lubrication and protection in all temperature conditions, including the so-called easy engine start during periods of large temperature drops. Designed for heavy duty Diesel engines that meet Euro VI and Euro V standards.

cifications and standard Specifications and standards. SAE: 5W-30, API: CJ-4, ACEA: E9/E7

MB 228.51; MB 228.31; MAN M3477; VOLVO VDS-4; VOLVO VOS-4; MACK EO-O PREMIUM PLUS 07; RENAULT VIRLD-3; CUMMINS CES 20079, 20081; DETROIT DESCE LEXTRANET 93K218; DEUTZ DQC IV-10 LA; JASO DH-2; MTU TYPE 3.1

Item No.	Cap.	Pcs in packag
882.005	5L	4
882.020	20L	1
882.060	60L	1
882.208	208L	1
882.850	850KG	1



#### **VENOLTRUCK BLUECK 410W30**

VENOL TRUCK MAX CJ 4 5W-30 LOW ASH is a specialised engine oil. It is produced from the highest quality of synthetic base oils, hydrogen treated oils and a high-tech system for the ASH-type refinements system. The combination of these components guarantees maximum engine protection. In addition, it extends the trouble-free operation of the engine and systems used in vehicles that meet Euro VI and Euro V standards, such as EGR exhaust gas recirculation or diesel particulate filters (DPF). The use of such highly advanced technology effectively reduces friction between cooperating elements, reduces fuel consumption and increases engine power.

VOLVO VDS-4.5; RENAULT RLD-4; MAN M. 3775;

MAN M., 3/17; MB 228.31; DEUTZ DOC-III-10 LA; CATERPILLAR ECF-3; JASO DH-2; MACK EO-S 4.5; CUMMINS CES 20086; DETROIT DIESEL DFS 93/K222; MTU Oil Category 2.1

Item No.	Cap.	Pcs in packag
258.005	5L	4
258.020	20L	1
258.060	60L	1
258.208	208L	1



#### **VENOLTRUCK BLUE CK 4 10W30 E8/E11**

Premium-quality, fuel-efficient engine oil designed for highly loaded turbocharged and non-turbocharged diesel engines equipped with the latest exhaust aftertreatment systems such as EGR, DPF, and DOC. The advanced MidSAPS oil technology significantly extends engine lifespan under extremely demanding operating conditions. It features excellent low-temperature properties, ensuring outstanding performance and complete engine protection against wear and corrosion in all working conditions. This oil can also be successfully used in gasoline engines, as it meets the API SN classification

Specifications and standards: SAE: 10W-30, API: CK-4/CJ-4/SN, ACEA: E6/ E7/E8/E9/E11

VOLVO VDS-4.5; RENAULT RLD-3; MAN M3775 MB 228.51/228.52 DEUTZ DQC-IV-18 LA; CATECF-3

JASO DH-2; MACK EO-S 4.5; CUMMINS CES 20086/92; DETROIT DIESEL DFS 93K222; MTU Typ 3.1; DAF PSQL 2.1 E-LD

Item No.	Cap.	Pcs in packag
737.005	5L	4
737.020	20L	1
737.060	60L	1
737.208	208L	1
737.850	850KG	1



#### VENOLTRUCK MAX CJ 4 CI 4 10W30 E6

Engine oil designed for diesel engines operating under heavy loads, compliant with EURO VI and EURO V standards. The "Low SAPS" formula ensures a low content of sulfur, phosphorus, and sulfate ash. It guarantees reliable operation of systems such as Exhaust Gas Recirculation (EGR) and Diesel Particulate Filters (DPF). Effectively reduces friction between interacting components, lowers fuel consumption, and helps increase engine power. Provides engine protection during cold starts.

Specifications and standards: SAE: 10W-30, API: CJ-4/CI-4, ACEA: E6/E9

SCANIAL DE-3 MB 228.51; MB 228.31; MAN M3477/M3271; VOLVO VDS-4

MACK EO-O PREMIUM PLUS 07; RENAULT VI RLD-3; CUMMINS CES 20076/77/78: DETROIT DIESEL EXTRANET 93K218: DEUTZ DQC IV-10 LA: JASO DH-2: MTU TYPE 3.1

Item No.	Cap.	Pcs in packag
266.005	5L	4
266.020	20L	1
266.060	60L	1
266,208	208L	1
200 050	DEOMO	4







#### VENOL TRUCK MAX CJ 4 10W30 E9/E7

Motor oil designed for heavy duty Diesel engines that meet Euro VI and Euro V standards. It guarantees failure-free operation of systems such as EGR exhaust gas recirculation or DPF particulate filters. It can be used for vehicles equipped with CNG gas engines.

Specifications and standards: SAE: 10W-30, API: CJ-4/CI-4, ACEA: E9/E7

SCANNALDF-3; MB 228.51; MB 228.31; MAN M3477; VOLVO VDS-4; MACK EO-O PREMIUM PLUS 07; RENAULT VI RLD-3; CUMMINS CES 20078, CES 20081; DETROIT DIESEL EXTRANET 939/218; DEUTZ DQC M-10.LA; JASO DH-2: MTU TYPE 3.1: CATERPILLAR ECF-3. ECF-2

Item No.	Cap.	Pcs in packaç
889.005	5L	4
889.020	20L	1
889.060	60L	1
889.208	208L	1
889.850	850KG	1



#### **VENOLTRUCK BLUECK 410W40**

Engine oil (MID ASH) intended mainly for Diesel engines. It provides excellent performance in modern, highly loaded engines with low emissions equipped with exhaust gas recirculation (EGR) and systems such as (DPF) and with oxidation catalysts for Diesel engines (DOC). It is fully compatible with older generation engines and can be used with the same success in standard engines equipped with older exhaust gas treatment solutions. Recommended for trucks, working machines, mining industry machinery, construction, aggregate mining and agriculture.

Specifications and standards: SAE: 10W-40, API: CK-4, ACEA: E9/E7

Recommended for:
VOLVO VDS-4.5;
RENAULT RLD-4;
MAN M., 3775;
MB 228.31;
DEUTZ DOC-III-10 LA;
CATERPILLAR ECF-3;
JASO DH-2; MACK EO-S 4.5; CUMMINS CES 20086; DETROIT DIESEL DFS 93K222; MTU Oil Category 2.1

Item No.	Cap.	Pcs in packag
256.005	5L	4
256.020	20L	1
256.060	60L	1
256.208	208L	1
256.850	850KG	1



#### VENOLTRUCK BLUE CK 410W40 E8/E11

A premium-quality engine oil designed for highly loaded diesel engines equipped with the latest exhaust aftertreatment systems such as EGR, DPF, and DOC. Its unique low-emission technology significantly extends engine lifespan under extremely demanding operating conditions. It features excellent low-temperature properties, ensuring outstanding performance and full anti-wear and anti-corrosion protection in all working conditions. This oil can also be successfully used in gasoline engines, as it meets the APISN classification.

Specifications and standards: SAE: 10W-40, API: CK-4/CJ-4/SN, ACEA: E6/E7/E8/E9/E11

Recommended for:
VOLVO VDS-4.5;
RENAULT RLD-3;
MAN M3775;
MAN M3775;
ME NEZ 28.51228.52;
DEUTZ DOC-IV-18 LA;
CAT ECF-3;
DASO DH-2; MACK EO-S 4.5; CUMMINS CES 20086/92;
DETROIT DIESEL DFS 93K222; MTU Typ 3.1

Item No.	Cap.	Pcs in packag
736.005	5L	4
736.020	20L	1
736.060	60L	1
736.208	208L	1
736 850	850KG	1



#### **VENOL SYNTHESIS TRUCK MAX CJ4 10W40**

Oil VENOL Synthesis Truck Max CJ 4 10W-40 is produced on the basis of specially selected synthetic and mineral oils, using the latest generation MID SAPS type additive package. The use of such highly advanced technology effectively reduces the friction between cooperating elements, ensures a decrease in fuel consumption and an increase in engine power. Very good low temperature properties guarantee optimal lubrication and protection in all temperature conditions, including the so-called easy engine start during periods of large temperature drops. Designed for heavy duty Diesel engines that meet Euro VI and Euro V standards.

Specifications and standarus. SAE: 10W-40, API: CJ-4, ACEA: E9

VOLVO VDS-4; MAN M. 3477; DEUTZ DQC IV-10 LA; JASO DH-2; RVIRLD-3; CUMMINS CES 20081; CAT ECF-3; MTU 3.1

Item No.	Cap.	Pcs in package
881.005	5L	4
881.020	20L	1
881.060	60L	1
881.208	208L	1
881.850	850KG	1



#### **VENOL TRUCK MAX CJ 4 CI 4 10W40 E6**

VENOL TRUCK MAX CJ 4 5W-40 LOW ASH is a specialised engine oil. It is produced from the highest quality synthetic base oils, hydrogen treatment processes and a technologically advanced system of additives, type LOW ASH. The combination of these components guarantees maximum engine protection. In addition, it extends engine operation and systems used in vehicles that meet Euro VI and Euro V standards, such as EGR exhaust gas recirculation or diesel particulate filters (DPF). The use of such highly advanced technology effectively reduces friction between cooperating elements, reduces fuel consumption and increases engine power.

Specifications and standards: SAE: 10W-40, API: CJ-4/CI-4, ACEA: E6/E9

SCANIA LDF-3; MB 228.51; MB 228.31; MAN M3477/M3271; VOLVO VDS-4; MACK EO-O PREMIUM PLUS 07; RENAULT VI RLD-3; CUMMINS CES 20067/77/8; DETROIT DISEL EXTRANET 93K218; DEUTZ DQC IV-10 LA; JASO DH-2; MTU TYPE 3.1

Item No.	Cap.	Pcs in packag
269.001	1L	12
269.004	4L	4
269.005	5L	4
269.020	20L	1
269.060	60L	1
269.208	208L	1
269.850	850KG	1



#### **VENOL TRUCK MAX CJ 4 CI 4 10W40**

Motor oil designed for heavy duty Diesel engines that meet Euro VI and Euro V standards. It guarantees failure-free operation of systems such as EGR exhaust gas recirculation or DPF particulate filters. It can be used for vehicles equipped with CNG gas engines

Specifications and standards: SAE: 10W-40, API: CJ-4/CI-4, ACEA: E9/E7

Recommended for SCANIALDF-3 MB 228.51; MB 228.31; MAN M3477: WOLVO VISA:, MACK EO-O PREMIUM PLUS 07; RENAULT VIRLD-3; CUMMINS CES 20078, CES 20081; DETROIT DIESEL EXTRANET93K218; DEUTZ DOC IV-10 LA; JASO DH-2; MTUTYPE 3.1; CATERPILLAR ECF-3; ECF-2

840.001	1L	12
840.004	4L	4
840.005	5L	4
840.020	20L	1
840.060	60L	1
840.208	208L	1



#### **VENOL SEMISYNTHETIC TURBO ACTIVE UHPDO CI 4 10W40**

Engine oil designed for diesel engines, that meet the Euro V emissions standards. It quarantees failure-free operation of systems such as EGR exhaust gas recirculation or DPF particulate filters. The low SAPS oil composition guarantees low levels of sulphfur, phosphorus and sulphated ash, according to the ACEAE-6 standards

Specifications and standards: SAE: 10W-40, API: CI-4, ACEA: E6/E9

VOLVO VDS-4 MB 228.51; MAN M. 3477; RENAULTRYIRXD RENAULTVIRLD 3: MACK EO-N; MTU TYPE 3.1; DEUTZ DQC IV-10; CATERPILLAR ECF-3: JASO DH-2: DAF: IVECO

Item No.	Cap.	Pcs in package
137.005	5L	4
137.020	20L	1
137.060	60L	1
137.208	208L	1
137.850	850KG	1





## TRUCK ENGINE OILS



#### **VENOL SEMISYNTHETIC DIESEL TRUCK XHPD CI 4 CG 4 10W40**

High quality motor oil based on synthetic base stocks. It delivers optimum, long-lasting wear protection for heavily loaded diesel engines with or without turbocharging. It is especially designed for powerful vehicles working in cycles of big individual mileage. It is especially recommended for semi-trailer trucks. It guarantees easy start up in low temperatures. It can be used in vehicles equipped with catalytic converter systems

Specifications and standards: SAE: 10W-40, API: CI-4/CG-4, ACEA: E7

VOLVO VDS-3; MAN 3277; RENAULT RLD; MB 228.5

Item No.	Cap.	Pcs in packag
014.005	5L	4
014.020	20L	1
014.060	60L	1
014.208	208L	1
014.850	850KG	1



#### **VENOLTRUCK BLUECK 4 15W40**

Engine oil (MID ASH) intended mainly for Diesel engines. It provides excellent performance in modern, highly loaded engines with low emissions equipped with exhaust gas recirculation (EGR) and systems such as (DPF) and with oxidation catalysts for Diesel engines (DOC). It is fully compatible with older generation engines and can be used with the same success in standard engines equipped with older exhaust gas treatment solutions. Recommended for trucks, working machines, mining industry machinery, construction, aggregate mining and agriculture.

Specifications and standards: SAE: 15W-40, API: CK-4/CJ-4/CI-4, ACEA: E9/E7

Recommended for: VOLVO VDS-4.5/VDS-4/VDS-3; MB 228.31; DEUTZ DQC-III-10 L; RENAULT RLD-4; MACK EO-S 4.5; JASO DH-2; CATERPILLAR ECF-3; CUMMINS CES 20086;

Item No.	Cap.	Pcs in packag
257.005	5L	4
257.020	20L	1
257.060	60L	1
257.208	208L	1
257.850	850KG	1



#### VENOLTRUCK BLUE CK4 15W40 E8/E11

A premium-quality mineral engine oil designed for highly loaded diesel engines equipped with the latest exhaust aftertreatment systems such as EGR, DPF, and DOC. Its unique low-emission technology significantly extends engine lifespan under extremely demanding operating conditions. It features excellent low-temperature properties, ensuring outstanding performance and full anti-wear and anti-corrosion protection in all working conditions. This oil can also be successfully used in gasoline engines, as it meets the API SN classification.

Specifications and standards: SAE: 15W-40, API: CK-4/CJ-4/SN, ACEA: E6/E7/E8/E9/E11

DETROIT DIESEL DFS 93K222; MTU Oil Category 2.1

Recommenses on .

VOLVO VDS-4.5;
RENAULT RLD-3;
MAN M3775;
MB 228.51/228.52;
DEUTZ DOC-IV-18 LA;
CATECF-3.1ASO DH-2;
MACK EO-S-4.5; CUMMINS CES 2008/9/3 DETROIT DIESEL DFS 93K222; MTU Typ 3.1

Item No.	Cap.	Pcs in packag
739.005	5L	4
739.020	20L	1
739.060	60L	1
739.208	208L	1
739,850	850KG	1



#### **VENOL LOGISTIC TRUCK CJ 4 15W40**

The highest quality engine oil prepared on the basis of high-grade oil and high-quality functional additives. Designed for all types of diesel engines used in trucks, agricultural machinery and other equipment that requires the use of oil in its class. Meets the emissions standards EURO V. The using of oil VENOL TRUCK CJ-4 15W-40guarantees extending oil drain intervals, thereby reducing engine maintenance costs. Excellent viscosity- properties provide easy cold starting and good pumping oil at low temperatures

Specifications and standards. SAE: 15W40, API: CJ-4, ACEA: E9

CAT ECF. 3; VOLVO VDS 4; MAN M. 3575; MB 228.51; RENAULT TRUCKS RLD 3; CUMMINS CES 20081; M.TU 2.1

Item No.	Cap.	Pcs in package
984.005	5L	4
984.020	20L	1
984.060	60L	1
984.208	208L	1
984 850	850KG	1



#### **VENOL LOGISTIC TRUCK XHPD CI 4 CH 4 15W40**

High quality motor oil based on selected mineral base stocks. It delivers optimum, long-lasting wear protection for heavily loaded diesel engines with or without turbocharging. It is especially designed for powerful vehicles working in cycles of big individual mileage. It is especially recommended for semi-trailer trucks. It guarantees easy start up in low temperatures. It can be used in vehicles equipped with catalytic converter systems.

Specifications and standards: SAE:15W40,API:CI-4/CH-4,ACEA:E7

Recommended for: MB 228.3; CAT ECF-1; VOLVO VDS-3; MAN 3275; RENAULT RLD2

Item No.	Cap.	Pcs in packag
019.001	1L	12
019.005	5L	4
019.007	7L	3
019.020	20L	1
019.060	60L	1
019.208	208L	1
019 850	850KG	1



#### **VENOL SUPER TRUCK SHPD CG 4 CH 4 15W 40**

Multigrade, mineral motor oil designed for use in heavily loaded diesel engines. The relevant composition of base stocks and functional additives increased cleanness of the engine during operation. It improves the engine power and extends the drain interval. It is designed for modern diesel engines which meet the Euro 4 standards. It can be used in older engine designs which meet the Euro 3, 2, and 1 standards.

Specifications and standards: SAE: 15W-40, API: CG-4/CH-4, ACEA: E7

Recommended for MB 228.3 MAN M 271 -1: VOLVO VDS-2 RENAULT RVI RD/RD-2: MTU Type 2; DEUTZ DQC-II-10; TATRATDS 30/12; TEDOM 258-3; AVIA: 712, D407, D421.76, D421.85

Item No.	Cap.	Pcs in packag
020.005	5L	4
020.007	7L	3
020.020	20L	1
020.060	60L	1
020.208	208L	1
000.050	05010	4



#### **VENOLTRUCK CF 415W40**

High quality multigrade mineral oil a new generation, designed for diesel engines with and without turbocharging. The relevant production technology and functional additives provides ideal lubrication, cleanliness and maximum engine protection under all conditions.

Specifications and standards: SAE: 15W40, API: CF-4, ACEA: E2

Recommended fo
MB 228.0; MB 228.
MTU Type 1.0;
MAN 270; MAN 271
VOLVO VDS-2

Item No.	Cap.	Pcs in packag
023.005	5L	4
023.020	20L	1
023.060	60L	1
023.208	208L	1
000 050	DEOMO	4







#### **VENOLTRUCK CE 15W40**

Multi-grade mineral oil designed for diesel engines with and without turbochargers. Designed especially for engines in passenger cars, commercial vehicles and trucks exposed to high engine stress in stop/start urban driving conditions. The latest manufacturing technology and a special additive system provide optimum lubricating properties, engine cleanliness and maximum wear protection.

Specifications and standards: SAE: 15W-40, API: CE, ACEA: E2

Item No.	Cap.	Pcs in packag
022.005	5L	4
022.020	20L	1
022.060	60L	1
022.208	208L	1
022.850	850KG	1



#### **VENOL DIESEL CD 15W40**

Multi-grade mineral oil designed for diesel engines with and without turbochargers exposed to exceptional engine stress. Formulated for engines powered by fuel with higher sulfur content (characteristic of low and medium quality fuel). Recommended for engines in passenger cars, trucks and buses. The latest manufacturing technology ensures compliance with requirements of modern motor engine producers.

Specifications and standards: SAE: 15W-40, API: CD, ACEA: B2/E2

Item No.	Cap.	Pcs in packa
025.001	1	12
025.004	4	4
025.005	5	4
025.020	20	1
025.060	60	1
025.208	208	1
025.850	850KG	1



#### VENOLTRUCK CJ 4 20W50

The highest quality engine oil prepared on the basis of high-grade oil and high-quality functional additives. Designed for all types of diesel engines used in trucks, agricultural machinery and other equipment that requires the use of oil in its class. Meets the emissions standards EURO V. The using of oil VENOL TRUCK CJ-4 20W-50 guarantees extending oil drain intervals, thereby reducing engine maintenance costs. Excellent viscosity- properties provide easy cold starting and good pumping oil at low temperatures.

Specifications and standards: SAE: 20W50, API: CJ-4, ACEA: E9

Recommended for: CATECF-3; VOLVO VDS 4; MAN M. 3575; RENAULTTRUCKS RLD-3; MB 228.51; CUMMINS CES 20081; MTU TYPE 2.1

Item No.	Cap.	Pcs in packag
240.005	5L	4
240.020	20L	1
240.060	60L	1
240.208	208L	1
240.850	850KG	1



#### VENOLTRUCK CI 4 20W50

High-quality engine oil produced on the basis of selected mineral bases. Guarantees the perfect and long-term protection of high-loaded diesel engines with or without turbocharger. It is intended in particular for high-power vehicles that operate in a cycle of large unit mileage. Especially recommended for tractors. Ensures easy engine starting at low temperatures. It is used in vehicles equipped with a catalytic exhaust gas afterburning system.

Specifications and standards: SAE: 20W-50, API: CI-4, ACEA: E7

Recommended fo MB 228.3; CAT ECF-1; VOLVO VDS 3; MAN 3275; RENAULT RLD2

Item No.	Cap.	Pcs in packag
887.005	5L	4
887.020	20L	1
887.060	60L	1
887.208	208L	1
887.850	850KG	1



#### VENOLTRUCK CF420W50

High quality new generation multigrade mineral oil, designed for diesel engines with and without turbocharging. The relevant production technology and functional additives provides ideal lubrication, cleanliness and maximum engine protection under alloconditions

Specifications and standards:

Recommended for: MB 228.0; MB 228.1; MAN 270; MAN 271; VOLVO VDS-2; MTU TYPE 1.0

Item No.	Cap.	Pcs in packag
024.005	5L	4
024.020	20L	1
024.060	60L	1
024.208	208L	1



#### VENOL DIESEL ECONOMIC CD 20W50

Mineral oil for whole year, designed for high-pressure engines with or without turbocharging, which are extensively exploited. Recommended for passenger cars, trucks and buses with high mileage. The most advanced production technology and accordingly selected viscosity additives reduce fuel and oil consumption.

Specifications and standards: SAE: 20W-50, API: CD, ACEA: B2/E2

Item No.	Cap.	Pcs in packag
027.001	1L	12
027.005	5L	4
027.020	20L	1
027.060	60L	1
027.208	208L	1
027.050	DEDICO	4



#### **VENOL DIESEL CD 10W**

Winter mineral oil drawn up with the thought about, delivery, working diesel engines of passenger cars both at small as well as big loads. Optimum putting together oil bases, and the package of ennobling additions is guaranteeing the protection and the reliability of the work of an engine.

Specifications and standards: SAE: 10W, API: CD

Item No.	Cap.	Pcs in packag
900.005	5L	4
900.020	20L	1
900.060	60L	1
900.208	208L	1
000 050	OEUNG	4





## TRUCK ENGINE OILS



#### VENOLHD 40 SFCD

Seasonal motor oil for use in diesel engines with and without turbocharging. Designed for trucks, vans, buses, and other land and sea vehicles, where are required high properties of cleaning and neutralizing. Oil for engines and applications where is acceptable to use oil API CD or lower grade, and proper viscosity grade.

Specifications and standards: SAE: 40, API: SF CD

Item No.	Cap.	Pcs in packag
920.001	1L	12
920.004	4L	4
920.005	5L	4
920.020	20L	1
920.060	60L	1
920,208	208L	1
920.850	850KG	1



#### VENOLHD 50 SFCD

Seasonal motor oil for use in diesel engines with and without turbocharging. Designed for trucks, vans, buses, and other land and sea vehicles, where are required high properties of cleaning and neutralizing. Oil for engines and applications where is acceptable to use oil API CD or lower grade, and proper viscosity grade.

Specifications and standards: SAE: 50, API: SF/CD

Item No.	Cap.	Pcs in package
168.001	1L	12
168.004	4L	4
168.005	5L	4
168.020	20L	1
168.060	60L	1
168,208	208L	1
168 850	850KG	1



#### VENOLHD 40 CF4

One-season engine oil designed for application in diesel engines with and without turbo-charging. Designed for trucks, vans, buses and other land and seas vehicles, which demand high refined engine oil. VENOL HD oil guarantees optimum lubrication under operating conditions, high level protection against corrosion and wear.

Specifications and standards: SAE: 40, API: CF 4

Item No.	Cap.	Pcs in packaç
250.001	1L	12
250.005	5L	4
250.020	20L	1
250.060	60L	1
250,208	208L	1
250.850	850KG	1



#### VENOLHD 50 CF4

One-season engine oil designed for application in diesel engines with and without turbo-charging. Designed for trucks, vans, buses and other land and seas vehicles, which demand high refined engine oil. VENOL HD oil guarantees optimum lubrication under operating conditions, high level protection against corrosion and wear.

Specifications and standards: SAE: 50, API: CF-4

Item No.	Cap.	Pcs in package
251.001	1L	12
251.004	4L	4
251.005	5L	4
251.020	20L	1
251.060	60L	1
251,208	208L	1
215 850	850KG	1





# **OILS FOR AGRICULTURE**



# **VENOLTRAKTOR STOUCG 4GL4HVLP10W30**

Semi-synthetic, multifunctional STOU 10W-30 oil, designed primarily for use in agricultural machinery and tractors, in all working conditions, year-round. Suitable for lubricating engines, various types of transmissions, wet brake clutches, and hydraulic systems. It provides excellent corrosion protection, prevents deposit formation, and keeps the entire lubrication system clean. Can also be used in older machines where the manufacturer recommends oils in the CF-4/CD class.

Specifications and standards: SAE: 10W-30, API: CG-4/GL-4, ACEA: E3, DIN 51524 cz.2: HVLP

FORD ESN-M2C159-B: FORD ESN-M2C159-B; JOHN DEERE J27; MASSEY FERGUSON CMS M1145/1144; ZF TE-ML 06B/07B; MB 227.1/228.1/228.3; NEW HOLLAND 82009201/2/3; NEW HOLLAND MAT 3525/3526

Item No.	Cap.	Pcs in package
260.005	5L	4
260.020	20L	1
260.060	60L	1
260.208	208L	1
260.850	850KG	- 1



#### **VENOLTRAKTOR STOUCG 4 GL 4 HVLP 10W40**

Semi-synthetic, multifunctional STOU 10W-40 oil, designed primarily for use in agricultural machinery and tractors, in all working conditions, throughout the year. Suitable for lubricating engines, various types of transmissions, wet brake clutches, and hydraulic systems. It provides excellent protection against corrosion, prevents the formation of deposits, and keeps the entire lubrication system clean. Can also be used in older machines where the manufacturer recommends oils in the CF-4/CD category

Specifications and standards: SAE: 10W-40API: CG-4/GL-4ACEA: E3DIN 51524 cz,2: HVLP

Recommended for: FORD ESN-M2C159-B; JOHN DEERE J27; MASSEY FERGUSON CMS M1145/1144; ZF TE-ML 06B/07B; MB 227.1/228.1/228.3; NEW HOLLAND 82009201/2/3; NEW HOLLAND MAT3525/3526

Item No.	Cap.	Pcs in packag
261.005	5L	4
261.020	20L	1
261.060	60L	1
261.208	208L	1
261,850	850KG	1



#### **VENOL TRAKTORULV HVLPCLPGL4 10W**

UTTO-type hydraulic and transmission oil, designed for universal use in transmission systems used in agricultural equipment, high-load hydraulic systems, and for lubricating the drivetrain, including systems with wet brakes.

Specifications and standards: SAE: 10W, API: GL-4, DIN 51524 cz.2: HVLP, DIN 51517 cz.3: CLP

Recommended for: CNH MAT 3525 (MS 1209); FORD M2C 1340; JOHN DEERE J20C; MASSEY FERGUSON CMS M1135, M1143, M1145; ALLISON C4; CATERPILLART-0-2; ZF TE-ML 03E005F; KUBOTAUDT FLUID

Item No.	Cap.	Pcs in packag
444.005	5L	4
444.020	20L	1
444.060	60L	1
444.208	208L	1
444.850	850KG	1



#### **VENOLTRAKTORUSV HVLPCLPGL475W80**

UTTO-type hydraulic and transmission oil, designed for universal use in transmission systems of agricultural machinery, high-load hydraulic systems, and for lubricating the drivetrain, including applications with wet brakes.

Specifications and standards. SAE: 75W-80, API: GL-4, DIN 51524 cz.2: HVLPDIN 51517 cz.3: CLP

Recommended for:
CNH MAT 3540;
FORD M2C 134D;
JOHN DEERE J20C;
ALLISON C-4;
CATERPILLAR TO-2;
ZF TE-ML 03E/05F;
KUBOTAUDT FLUID;
MASSEY FERGUSON CMS M1135; M1143; M1145

item No.	Cap.	rus III paukay
535.005	5L	4
535.020	20L	1
535.060	60L	1
535.208	208L	1
535.850	850KG	1



# **VENOL TRAKTOR U HVLP CLP GL 4 10W30**

Hydraulic and transmission oil for universal use in transmission systems, hydraulic systems, for lubricating the drivetrain (including wet brakes), and as a working fluid in the hydraulic systems of tractors and other agricultural machinery.

Specifications and standards: SAE: 10W-30, API: GL-4, DIN: HVLP, CLP

Recommended for: CNH MAT 3525 (MS 1209); FORD M2C 134D; JOHN DEERE J20C; ALLISON C-4; CATERPILLAR TO-2; ZF TE-ML 03E/05F

Item No.	Cap.	Pcs in packag
047.005	5L	4
047.020	20L	1
047.060	60L	1
047.208	208L	1
0.47.050	050110	



## **VENOL VENLUB 26**

Mineral oil designed for use in hydraulic systems operating under heavy-duty conditions, power steering mechanisms in motor vehicles, as well as in hydromechanical and mechanical transmissions. It contains an additive package that improves viscosity-temperature characteristics, lubrication properties, and provides anti-scale, anti-corrosion, and antioxidant protection.

Specifications and standards: ISO VG: 32-46, ISO: L-HV, DIN 51524-3

Item No.	Cap.	Pcs in packag
039.005	5L	4
039.020	20L	1
039.060	60L	1
039.208	208L	1
039,850	850KG	1



# **VENOL VENLUB TDTO 4 SAE 10W**

Multifunctional transmission oil that meets strict quality requirements. It is used in hydraulic or hydro-mechanical systems of machines from leading manufacturers. Compatible and miscible with CATTO-2 specification oils, as well as with hydraulic and engine oils. Eliminates wet brake squeal, protects lubricated components against corrosion and excessive wear. Ensures long transmission life thanks to an optimal level of friction-modifying additives. Switching from CAT TO-2 to CAT TO-4 oil does not negatively affect the system in any way.

Specifications and standards: SAE: 10W, API: GL-4

Item No.	Cap.	Pcs in package
336.005	5L	4
336.020	20L	1
336.060	60L	1
336.208	208L	1









# **VENOL VENLUB TDTO 4 SAE 30**

Multifunctional transmission oil meeting stringent quality standards. Designed for use in hydraulic and hydrostatic transmission systems of machinery from leading manufacturers. It is miscible and compatible with oils meeting CAT TO-2 specifications, as well as with hydraulic and engine oils. Eliminates so-called wet brake squeal, protects lubricated components from corrosion and excessive wear. Ensures long transmission life thanks to an optimal amount of friction-reducing additives. Switching from CAT TO-2 to CAT TO-4 oil does not adversely affect the system.

Specifications and standards: SAE: 30, API: GL-4

Recommended for: CATTO-4; CATTO-4M; KOMATSU KES 07.868.1; ZF TE-ML 03C, 07D, 07F; Allison C4

Item No.	Сар.	Pcs in packag
804.020	20L	1
804.060	60L	1
804.208	208L	1
804,850	850KG	1



#### **VENOL VENLUB TDTO 4 SAE 50**

Multifunctional gear oil meeting stringent quality requirements. Used in hydraulic or hydrostatic transmission systems of machines from leading manufacturers. Compatible and miscible with oils meeting CAT TO-2 specifications, as well as hydraulic and engine oils. Eliminates so-called wet brake squeal, protects lubricated components from corrosion and excessive wear. Ensures long transmission life thanks to an optimal amount of friction-reducing additives. Switching from CAT TO-2 to CAT TO-4 oil does not adversely affect the system.

Specifications and standards SAE: 50, API: GL-4

Recommended for: CATTO-4; CATTO-4M; KOMATSU KES 07.868.1; ZF TE-ML 03C, 07F; ALLISON C-4

Item No.	Сар.	Pcs in packag
337.020	20L	1
337.060	60L	1
337.208	208L	1
337.850	850KG	1





# **VENOL GARTEN 2T TC**

High-quality semi-synthetic oil designed for use in two-stroke engines with premixed lubrication systems. Used in combustion engines of lawn mowers, brush cutters, trimmers, and chainsaws. The use of a solvent allows direct application into the fuel tank without the need for additional mixing. 100 ml of oil is sufficient for 5 liters of fuel.

Specifications and standards API: TC

Item No.	Cap.	Pcs in packag
042 0004	0.11	50



#### **VENOL GARTEN SG CE 30**

Mineral engine oil designed for four-stroke engines used in garden machinery. Suitable for use in the engines of lawn mowers, brush cutters, and trimmers. Perfect for engines operating in cultivators, micro-tractors, rototillers, plows, and other auxiliary equipment.

Specifications and standards: SAE: 30, API: SG/CE

Item No.	Cap.	Pcs in packag
045.0006	0,6L	16
045.001	1L	12
045.020	20L	1
045.060	60L	1
045.208	208L	1
045.850	850KG	1



# VENOL SÄGEÖL 68 OLEJ DO PIŁ

Mineral oil designed for lubricating sawmill blades and chains of handheld chainsaws. The use of adhesive and anti-wear additives ensures high durability of the oil film and reduces wear of cooperating components.

Specifications and standards:

Item No.	Сар.	Pcs in packag
046.001	1	12
046.005	5	4
046.020	20	1
046.060	60	1
046.208	208	1
0.00.000	0.00	







# IN NUMBERS



23

years on the market

85+

+008

products

5

independent production lines

**7,2mln** 

packages monthly

7900

maximum monthly production capacity in tons





# **INDUSTRIAL OILS**

# Hydraulic oils



# VENOL VENLUB L HL 32/46/68/100/150

Mineral hydraulic oils with a composition of antiwear, antioxidant, anti-corrosive additives. Formulated for use in medium-duty fluid drive and hydraulic control systems. Can be used in in medium-loaded gears and circular systems.

Specifications and standards: ISO VG: 32 / 46 / 68 / 100 / 150 ISO: L-HL, DIN 51524-1

Product / Item number	Capacity / Pcs per package						
Froduct/ Item number	20L / 1	60L / 1	208L / 1	850KG /			
VENOL VENLUB L HL 32	050.020	050.060	050.208	050.850			
VENOL VENLUB L HL 46	051.020	051.060	051.208	051.850			
VENOL VENLUB L HL 68	052.020	052.060	052,208	052.850			
VENOL VENLUB L HL 100	053.020	053.060	053,208	053,850			
VENOL VENITIBLE HI 150	054 020	054 060	054 208	054 850			



#### VENOL VENLUB L HLP 22 / 32 / 46 / 68 / 100 / 150

Hydraulic oils with enhanced antiwear properties. Formulated for use in hydraulic power transmission systems and control systems. Thanks to zinc-containing additives, L-HLP oils have excellent antiwear properties, as well as anti-corrosive, antioxidant, anti-foaming and deemulsifying characteristics. Oils characterized by outstanding filterability.

Specifications and standards: ISO VG: 22/32/46/68/100/150 ISO: L-HLP, DIN 51524-2

Product / Item number	Capacity / Pcs per package						
Trouber Hom Hamber	20L / 1	60L / 1	208L / 1	850KG / 1			
VENOL VENLUB L HLP 22	055.020	055,060	055.208	055,850			
VENOL VENLUB L HLP 32	056.020	056,060	056,208	056.850			
VENOL VENLUB L HLP 46	057.020	057.060	057.208	057.850			
VENOL VENLUB L HLP 68	058.020	058.060	058.208	058.850			
VENOL VENLUB L HLP 100	059.020	059.060	059.208	059.850			
VENOLVENIUD LUI DAGO	000 000	000.000	000 000	000.050			



# VENOL VENLUB L HV 32 / 46 / 68 / 100 / 150

Hydraulic oils with high viscosity indexes for control and hydraulic systems operating in variable temperatures. Can be used in high pressure piston and vane pumps. L-HV oils have exceptional antiwear, anti-corrosive and antioxidant properties and are characterized by very high gel strength.

Specifications and standards ISO VG: 32/46/68/100/150 ISO: L-HV. DIN 51524-3

Product / Item number	Capacity / Pcs per package					
Product/ Item number	20L / 1	60L / 1	208L / 1	850KG / 1		
VENOL VENLUB L HV 32	067.020	067,060	067,208	067,850		
VENOL VENLUB L HV 46	068.020	068.060	068.208	068.850		
VENOL VENLUB L HV 68	069.020	069.060	069.208	069.850		
VENOL VENLUB L HV 100	070.020	070.060	070.208	070.850		
VENOL VENLUB L HV 150	071.020	071.060	071.208	071.850		



# VENOL VENLUB L HLP/HM 22/32/46/68/100/150 zinc free

Hydraulic oils produced with highly refined mineral oils and a zinc-free package of additives. It is designed for all kinds of hydraulic systems of machines and devices operating in normal and difficult operating conditions, especially in a continuous system and when there is a risk of water contamination of the system. These oils guarantee: excellent cleaning and dispersing properties, excellent anticorrosion and anti-wear properties, very good oxidation stability, very good filterability-even in the presence of water.

Specifications and standards: ISO VG: 22/32/46/68/100/150 ISO: L-HM, DIN 51524-2

Product / Item number	Capacity / Pcs per package				
Product / Rein Humber	20L / 1	60L/1	208L / 1	850KG/	
VENOL VENLUB L HLP/HM 22 zinc free	281.020	281.060	281.208	281.850	
VENOL VENLUB L HLP/HM 32 zinc free	065.020	065.060	065.208	065.850	
VENOL VENLUB L HLP/HM 46 zinc free	943.020	943.060	943.208	943.850	
VENOL VENLUB L HLP/HM 68 zinc free	944.020	944.060	944.208	944.850	
VENOL VENLUB L HLP/HM 100 zinc free	285.020	285.060	285.208	285.850	
VENOL VENLUB L HLP/HM 150 zinc free	286.020	286.060	286,208	286.850	



# VENOL VENLUB L HV 32/46/68/100/150 zinc free

Hydraulic oils produced with highly refined mineral oils and a zinc-free package of improvers. The oils are intended for all kinds of hydraulic systems of machines and devices operating in normal and difficult working conditions, especially in a continuous system and when there is a risk of water contamination of the system. These oils guarantee: excellent cleaning and dispersing properties, excellent anticorrosion and anti-wear properties, very good oxidation stability, very good filterability-even in the presence of water.

ISO VG: 32/46/68/100/150 ISO: L-HV, DIN 51524-3

Product / Item number	Capacity / Pcs per package					
Product / Rein number	20L / 1	60L / 1	208L / 1	850KG / 1		
VENOL VENLUB L HV 32 zinc free	287.020	287.060	287.208	287.850		
VENOL VENLUB L HV 46 zinc free	953.020	953.060	953.208	953.850		
VENOL VENLUB L HV 68 zinc free	289.020	289.060	289.208	289.850		
VENOL VENLUB L HV 100 zinc free	290.020	290.060	290.208	290.850		
	004 000	004 000	004 000	004.050		

Gear oils



# VENOL VENLUB RSX CLP 68 / 100 / 150 / 220 / 320 / 460

Universal oils for industrial gears in machines and appliances operating under extreme conditions, where oil with enhanced load carrying capacity, exceptional oxidation and corrosion resistance and high deemulsifying properties is required. RSX CLP oils contain EP-type sulfur-phosphorus additives.

Specifications and standards: ISO VG: 68 / 100 / 150 220 / 320 / 460

Product / Item number	Capacity / Pcs per package				
Froduct / Rem number	20L / 1	60L / 1	208L / 1	850KG / 1	
VENOL VENLUB RSX CLP 68	094,020	094,060	094,208	094,850	
VENOL VENLUB RSX CLP 100	095.020	095.060	095.208	095.850	
VENOL VENLUB RSX CLP 150	096.020	096.060	096.208	096.850	
VENOL VENLUB RSX CLP 220	097.020	097.060	097.208	097.850	
VENOL VENLUB RSX CLP 320	098.020	098.060	098.208	098.850	
VENOL VENIUS RSX CLP 460	099 020	099 060	099 208	099 850	




# VENOL VENLUB LDAJ 32/46/68/100/150 SYNTHETIC

Venol L - DAJ Fully Synthetic oil is the highest quality, fully synthetic compressor oil. It is intended for the lubrication of piston and rotary (vane) air compressors operating in moderate conditions. It can also be used for the lubrication of screw compressors operating in severe conditions. Characterized by good oxidation resistance, low coking tendency, excellent anti-corrosion and demulsifying properties.

Specifications and standards ISO VG: 32/46/68/100/150 ISO:1 – DAJ

Product / Item number	Capacity / Pcs per package			
Froduct / Item Humber	20L / 1	60L / 1	208L / 1	850KG /
VENOL VENLUB LDAJ 32 SYNTHETIC	292.020	292.060	292.208	292.850
VENOL VENLUB LDAJ 46 SYNTHETIC	293.020	293.060	293,208	293.850
VENOL VENLUB LDAJ 68 SYNTHETIC	294.020	294.060	294,208	294.850
VENOL VENLUB LDAJ 100 SYNTHETIC	295.020	295.060	295.208	295.850
VENOL VENLUB LDAJ 150 SYNTHETIC	296.020	296.060	296,208	296.850







# Compressor oils



# VENOL VENLUB LDAJ 32 / 46 / 68 / 100 / 150

High-quality compressor oil intended for the lubrication of rotary air compressors, produced of high-quality mineral oils. It contains optimally selected enriching additives such as antioxidants, corrosion inhibitors and EP additives. Thanks to the unique properties of oxidation resistance, it provides extended periods between oil changes, reduces downtime and repair costs. It can be used also as a hydraulic fluid in turbine control systems and for lubrication of circulation systems of steam, gas and water turbines.

Specifications and standards: ISO VG: 32 / 46 / 68 / 100 / 150 ISO: L – DAJ DIN 51517-3; 51524-3

Product / Item number	Ca	Capacity / Pcs per package				
Product / Item number	20L/1	60L / 1	208L / 1	850KG / 1		
VENOL VENLUB LDAJ 32	297.020	297.060	297.208	297.850		
VENOL VENLUB LDAJ 46	298.020	298.060	298.208	298.850		
VENOL VENLUB LDAJ 68	299.020	299.060	299.208	299.850		
VENOL VENLUB LDAJ 100	300.020	300.060	300.208	300.850		
VENOL VENIUR I DAJI 150	301 020	301 060	301 208	301 850		



# VENOL VENLUB L DAB 32 / 46 / 68 / 100 / 150

L DAB compressor oils are formulated for drop lubrication of reciprocating and rotary air compressors operating under moderate conditions. Provide excellent oxidation resistance, outstanding anti-corrosive and deemulsifying properties.

Specifications and standards: ISO VG: 32/46/68/100/150 ISO: L—DAB DIN 51506: VD-L PN-91/C-96073

Product / Item number	Capacity / Pcs per package				
	20L / 1	60L / 1	208L / 1	850KG / 1	
VENOL VENLUB LDAB 32	072.020	072.060	072.208	072.850	
VENOL VENLUB LDAB 46	073.020	073.060	073.208	073.850	
VENOL VENLUB LDAB 68	074.020	074.060	074.208	074.850	
VENOL VENLUB LDAB 100	075.020	075.060	075.208	075.850	
VENOL VENLUB LDAB 150	076.020	076.060	076.208	076.850	

# Marine oils



# VENOL VENLUB MARINE CB 30 / 40 / 50

High quality marine oils for circulatory lubrication of low-speed crosshead engines. Especially recommended for marine engines.

Specifications and standards SAE: 30/40/50 API: CB

Product / Item number	Capacity / Pcs per package			
	20L / 1	60L / 1	208L / 1	850KG / 1
VENOL VENLUB MARINE CB 30	284.020	284.060	284.208	284.850
VENOL VENLUB MARINE CB 40	088.020	088.060	088.208	088.850
VENOL VENIUR MARINE CR 50	080 030	080 060	080 208	080 850



### **VENOLVENLUB MARINE CC 30 / 40**

High quality marine oils for circulatory lubrication of low-speed crosshead engines. Especially recommended for marine engines.

Specifications and standards SAE: 30/40 API: CC

Product / Item number	Capacity / Pcs per package			
	20L / 1	60L / 1	208L / 1	850KG / 1
VENOL VENLUB MARINE CC 30	290.020	290.060	290.208	290.850



# **VENOL VENLUB MARINE CD 30 / 40**

High quality marine oils for circulatory lubrication of low-speed crosshead engines. Especially recommended for marine engines.

Specifications and standards: SAE: 30 / 40 API: CD

Product / Item number	Capacity / Pcs per package			
	20L / 1	60L/1	208L / 1	850KG / 1
VENOL VENLUB MARINE CD 30	292.020	292.060	292,208	292,850
VENOL VENIUR MARINE CD 40	093 020	293 060	293 208	293 850

# Machine oils



## VENOL VENLUB LAN 32 / 46 / 68 / 100 / 150

High quality mineral oils for lubricating medium-duty machine parts (bearings, leads, spindles, gears etc.).

Specifications and standards ISO VG: 32/46/68/100/150 ISO: L—AN DIN 51501

Product / Item number	Capacity / Pcs per package					
Product / item number	20L / 1	60L/1	208L / 1	850KG / 1		
VENOL VENLUB LAN 32	082.020	082.060	082.208	082.850		
VENOL VENLUB LAN 46	083.020	083.060	083.208	083.850		
VENOL VENLUB LAN 68	084.020	084.060	084.208	084.850		
VENOL VENLUB LAN 100	085.020	085.060	085.208	085.850		
VENOL VENLUB LAN 150	086.020	086.060	086.208	086.850		



# **INDUSTRIAL OILS**

# Industrial oils – other



# **VENOL VENLUB GUIDE OIL/SLIDEMAX**

Oil designed for lubricating all types of sliding guides, especially vertical guides. It provides proper friction characteristics and eliminates the "stick-slip" phenomenon. It ensures extended operating time of cutting systems and tools.

Specifications and standards: ISO VG: 68, DIN 51502 - CGLP

Item No.	Cap.	Pcs in package
380.005	5L	4
380.020	20L	1
380.208	208L	1
200.050	0EUNC	4



#### **VENOL VENLUB VACUUM PUMP OIL SAE 100**

VENOL Venlub oil for vacuum pumps is obtained on the basis of high-quality mineral base oils, obtained as a result of processing of crude oil. By using specially selected additives, this oil has a very good anticorrosive and antioxidant properties. This oil is intended for use in rotary vacuum pumps. It has good resistance to oxidation, excellent lubricating properties, has very good anti-corrosion properties.

Specifications and standards: ISO VG: 100

Item No.	Cap.	Pcs in packag
806.020	20L	1
806.208	208L	1
806.850	850KG	1



#### **VENOL PNEUMATIC VG100**

Oil for pneumatic tools used in drilling in the wells in the rocks. Produced from mineral base oils and appropriate additives typical for such kind of work. The oil while working creates a lubricating film difficult to break, prevents friction surfaces working under high pressure. Adhesive properties, preventing and emulsifying agents provide extended operation of the equipment even in a damp, dusty environment. This oil is used for lubrication of highly loaded pneumatic tools such as drills, hammers, drills, etc., and is used in underground and surface mining excavations.

Specifications and standards: ISO VG: 100

Item No.	Cap.	Pcs in packaç
246.020	20L	1
246.208	208L	1
0.40,050	OFOICO	



### **VENOL MOLDING OILS**

The oils are produced using highly refined mineral oils, enriched with a carefully selected package of enhancing additives, including active ingredients that protect surfaces against corrosion. These oils are used for coating molds in concrete production. Form oils are applied to lubricate molds as an anti-adhesive agent in aerated concrete manufacturing or may be used for other applications upon prior agreement with the customer. They are produced in various viscosity grades depending on the method of application when coating steel molds and others.

Specifications and standards ISO VG: 22, 32, 46, 68, 100, 150

Item No.	Cap.	Pcs in packag
116.208	208L	1
116.850	850KG	1



# VENOLEMULSIFYING OILS ES-12

Emulsifying oils for metalworking have been developed for preparing water-based emulsions used as cooling and lubricating fluids in machining steel, cast iron, nonferrous metals, and their alloys. The recommended emulsion concentration, depending on the type of machining and the material being processed, ranges from 5% to 15%. It is advised to prepare the emulsions using water with a hardness of up to 15°N. Recommended working concentrations of the emulsion (prepared with water hardness up to 15°N) depending on the type of machining and material: grinding –3 to 5%, turning, milling, drilling, reaming –5 to 10%, threading – 10 to 15%.

Specifications and standards:

Item No.	Cap.	Pcs in packag
117.020	20L	1
117.208	208L	1
117 050	0EUNC	4







# VENOL MOTOR OIL





# **AUTOMOTIVE CHEMICALS**

# Antifreeze fluids



#### **VENOL ANTIFREEZE -5°C BLUE / RED / GREEN**

Radiator fluid produced based on ethylene glycol. It provides protection for cooling systems both in winter and summer. Thanks to its modern formulation (additive package), it protects aluminum radiator parts, other metal components, seals, and rubber parts. It meets the requirements of leading automobile manufacturers.

	Product / Item No.	Cap. / Pcs	per pack
		5L / 4	20L / 1
	VENOL ANTIFREEZE -5°C BLUE	354,005	354.020
	VENOL ANTIFREEZE -5°C RED	353,005	353,020
	VENOL ANTIFREEZE -5°C GREEN	355,005	355.020



#### **VENOL ANTIFREEZE -15°C BLUE / RED / GREEN**

Radiator fluid produced based on ethylene glycol. It provides protection for cooling systems both in winter and summer. Thanks to its modern formulation (additive package), it protects aluminum radiator parts, other metal components, seals, and rubber parts. It meets the requirements of leading automobile manufacturers.

Product / Item No.	Cap. / Pcs per pack		
	5L / 4	20L / 1	
VENOL ANTIFREEZE -15°C BLUE	308.005	308,020	
VENOL ANTIFREEZE -15°C RED	319,005	319,020	
VENOL ANTIFREEZE -15°C GREEN	307 005	307 020	



# **VENOL ANTIFREEZE -25°C BLUE / RED / GREEN**

Radiator fluid produced based on ethylene glycol. It provides protection for cooling systems both in winter and summer. Thanks to its modern formulation (additive package), it protects aluminum radiator parts, other metal components, seals, and rubber parts. It meets the requirements of leading automobile manufacturers.

	Product / Item No.	Cap. / Pcs per pack		
		5L / 4	20L / 1	
	VENOL ANTIFREEZE -25°C BLUE	367.005	367.020	
	VENOL ANTIFREEZE -25°C RED	316.005	316.020	
	VENOLANTIEDEEZE 25°C CDEEN	317.005	317 020	



# VENOL ANTIFREEZE -35°C BLUE / RED / GREEN

Radiator fluid produced based on ethylene glycol. It provides protection for cooling systems both in winter and summer. Thanks to its modern formulation (additive package), it protects aluminum radiator parts, other metal components, seals, and rubber parts. It meets the requirements of leading automobile manufacturers.

Product / Item No.	Cap. / Pcs per pack					
Product/Item No.	1L / 12	5L / 4	20L / 1	60L / 1	214KG / 1	1070KG / 1
VENOL ANTIFREEZE -35°C BLUE	310.001	310.005	310.020	310.060	310.214	310.900
VENOL ANTIFREEZE -35°C RED	340.001	340.005	340.020	340.060	340.214	340.900
VENOL ANTIFREEZE -35°C GREEN	330,001	330.005	330.020	330.060	330,214	330,900



# VENOL CONCENTRATE ANTIFREEZE BLUE / RED / GREEN

Concentrate of radiator fluid produced based on ethylene glycol. It provides protection for cooling systems both in winter and summer. Thanks to its modern formulation (additive package), it protects aluminum radiator parts, other metal components, seals, and rubber parts. It meets the requirements of leading automobile manufacturers.

Product / Item No.	Cap. / Pcs per pack					
Floduct / Item No.	1L / 12	5L / 4	20L/1	60L / 1	214KG / 1	1070KG / 1
VENOL CONCENTRATE ANTIFREEZE BLUE	311.001	311.005	311.020	311.060	311.214	311.900
VENOL CONCENTRATE ANTIFREEZE RED	341.001	341.005	341.020	341.060	341.214	341.900
VENOL CONCENTRATE ANTIFREEZE GREEN	331.001	331.005	331.020	331.060	331.214	331.900



# VENOLANTIFREEZE G-12+

G12+ radiator fluid is a ready-to-use coolant produced based on ethylene glycol and carefully selected enhancing additives. It is compatible with all ethylene glycol-based coolants. G12+ fluid is suitable for long-term use in LONG LIFE engine cooling systems and is compatible with all car brands. It is designed for aluminum, steel, and copper radiators. G12+ protects against overheating in summer and freezing in winter, with a freezing point below -37°C. It also prevents corrosion within the cooling system.

ASTM D 3306; ASTM D 2570;
VWTI774;
MB 325.3;
MTU MTL 5048;
MAN 324 typ SNF;
GM 6277M;
SCANIATI 02 98 0813 T/B/M.;
Opel GMW3420;
Renault Nissan RNUR 41 01 001/SD;
Land Rover; Ford WSS M.97B44 D/E;
Mazda MEZ MN 121 D; CAT MAK A4.05.09.01;
Claas: Cummins IS u 14: John Deere JDMH5

Item No.	Cap.	Pcs per pac
302.001	1L	12
302.005	5L	4
302.020	20L	1
302,060	60L	1
302,214	214KG	1
000 000	4070140	



# **VENOL ANTIFREEZE CONCENTRATE G-12+**

Concentrate of cooling system fluid based on ethylene glycol and carefully selected enhancing additives, which according to the Nexium brand meets the Volkswagen/Audi/Seat/Skoda specification: TL 774-G12+. It provides excellent protection against freezing, corrosion, rust, and boiling. The product uses state-of-the-art silicate-free technology primarily based on organic acids, ensuring long-lasting, maintenance-free protection of all engine components, including those made of aluminum, ferrous metals, and their alloys. Mixing ratio: 50% concentrate + 50% water – providing freeze protection down to-37°C.

ASTM D 3306; ASTM D 2570;
VW TI774;
MB 325.3;
MTU MTL 5048;
MAN 324 typ SNF;
GM 6277M;
SCANIATI 02 98 0813 T/B/M.;
Opel GMW3420;
Renault Nissan RNUR 41 01 001/SD;
Land Rover; Ford WSS M97B44 D/E;
Mazda MEZ MN 121 D; CAT MAK A4.05.09.01
Claas; Cummins IS u 14; John Deere JDMH5

Item No.	Cap.	Pcs per paci
303.001	1L	12
303.005	5L	4
303.020	20L	1
303.060	60L	1
303.214	214KG	1
303,900	1070KG	1







# Antifreeze fluids



# **VENOLANTIFREEZE G-13**

Longlife type automotive coolant based on monoethylene glycol and high-quality enhancing additives. It is compatible with all previous longlife coolant versions such as G12, G12+, and G12++. Primarily recommended for vehicles from the VW Group: VW, Audi, Seat, and Skoda. It is also successfully used in other car brands that require this type of coolant. Freezing point: - 37°C.

Recommended for ASTM D 3306; ASTM D 2570; VW TI774; MB 325.3

Item No.	Cap.	Pcs per pack
306.001	1L	12
306.005	5L	4
306.020	20L	1
306.060	60L	1
306.214	214KG	1
306 900	1070KG	1



#### **VENOL ANTIFREEZE CONCENTRATE G-13**

Concentrate of longlife automotive coolant based on monoethylene glycol and high-quality enhancing additives. When diluted with demineralized water at a 1:1 volume ratio, it provides a freezing point of -37°C. Compatible with all previous longlife concentrate versions such as G12, G12+, and G12++. Primarily recommended for vehicles from the VW Group: VW, Audi, Seat, and Skoda. It is also successfully used in other car brands requiring this type of coolant.

Recommended for ASTM D 3306; ASTM D 2570; VW TI774; MB 325.3

Item No.	Сар.	Pcs per pack
305.001	1L	12
305.005	5L	4
305.020	20L	1
305.060	60L	1
305.214	214KG	1
305,900	1070KG	1

# Brake fluids



#### A.M.G. VENOL DOT-3 BRAKE FLUID

Brake fluid. A high-quality, modern brake fluid designed for use in clutch systems as well as disc and drum brake systems of passenger cars, trucks, buses, and motorcycles. Suitable for vehicles equipped with Electronic Stability Program (ESP).

Specifications and standards: SAE J 1703, ISO 4925, FMVSS No. 116, PN-C-40005

Item No.	Сар.	Pcs per pac
404.250	0,25KG	35
404.455	0,455KG	16
404.001	1L	12
404.005	5L	4
404.000	201	4



#### A.M.G. VENOL DOT-4 BRAKE FLUID

Brake fluid. A high-quality, modern brake fluid designed for use in clutch systems as well as disc and drum brake systems in passenger cars, trucks, buses, and motorcycles. Suitable for vehicles equipped with Electronic Stability Program (ESP).

Specifications and standards: SAE J 1703, ISO 4925, FMVSS No. 116, PN-C-40005

Item No.	Сар.	Pcs per paci
405.250	0,25KG	35
405.455	0,455KG	16
405.001	1L	12
405.005	5L	4
405.020	201	1

# Windshield washer fluids



# **Venol Scheibenreiniger-summer**

High-quality windshield washer fluid for cleaning and spraying car windows. Effectively removes dirt, grease, insects, and other contaminants during the summer season. Does not leave streaks or smudges. Harmless to wiper blades' rubber, seals, and vehicle paint. Leaves a pleasant fragrance inside the vehicle.

Item No.	Cap.	Pcs per pack
200.005	5L	4
200,020	20L	1



# Venol Scheibenreiniger - 20°C

Ready-to-use, high-quality windshield washer fluid for cleaning and spraying car windows. It has excellent cleaning properties, removing greasy stains and water-insoluble dirt from windows and automotive optical devices. Suitable for use at temperatures down to-20°C

Item No.	Cap.	Pcs per pack
207.005	5L	4
207.020	20L	1



# Venol Scheibenreiniger -22°C

Ready-to-use, high-quality windshield washer fluid for cleaning and spraying car windows. It has excellent cleaning properties, removing greasy stains and water-insoluble dirt from windows and vehicle optical devices. Suitable for use at temperatures down to -

Item No.	Cap.	Pcs per pack
202.005	5L	4
202.020	20L	1



# **VENOL Scheibenreiniger-80 Konzentrat**

Washer fluid concentrate -80. High-quality concentrate for cleaning and spraying car windows. Requires dilution according to the provided table. Contains fragrance.

Item No.	Cap.	Pcs per pack
203.005	5L	4
203.020	20L	1



## **VENOL PŁYN DO SPRYSKIWACZY -22 Methanol**

Ready-to-use, high-quality windshield washer fluid for cleaning and spraying car windows. It has excellent cleaning properties, effectively removing greasy stains and water-insoluble dirt from windows and automotive optical devices. Suitable for use in ambient temperatures down to -22°C.

Item No.	Cap.	Pcs per pack
209.005	5L	4





# **AUTOMOTIVE CHEMICALS**

# Additional substances



# **VENOL VENBLUE**

A non-toxic aqueous urea solution used for the chemical reduction of nitrogen oxides (NOx) in diesel engine vehicles equipped with SCR technology. It complies with DIN V 70070 standards as well as ISO and CEFIC regulations, ensuring safe and reliable operation of the SCR system in vehicles.

Item No.	Cap.	Pcs per pack	Item No.	Cap.	Pcs per pack
660.005	5L	4	660.200	200	1
660.010	10L	1	660.900	1070	1
660.020	20L	1			



#### **VENOL DIESEL ENTFROSTER 1:1000**

Diesel fuel antifreeze helps start the engine in low temperatures. It removes moisture and prevents fuel system blockages. It lowers the fuel's pour point and enhances the properties of diesel fuel. It mixes with diesel fuel.

Item No.	Сар.	Pcs per pack
754.001	1L	16
754 005	51	4



#### **VENOL WODA DEMINERALIZOWANA**

High-purity demineralized water, free of mineral salts and ions due to ion exchange and/or reverse osmosis processes. Intended for technical, laboratory, and industrial applications where ion-free water is required.

Item No.	Cap.	Pcs per pack
801.001	1L	12
801.005	5L	4

# Cleaning fluids and agents



# A.M.G. VENOL GLASS CLEANER

Glass cleaner developed using modern SUPER ACTIVE technology, designed for cleaning all types of glass surfaces, including car windows, house windows, and mirrors. It also works excellently for cleaning glossy tiles, bathroom fixtures, and aluminum surfaces.

Item No.	Cap.	Pcs per pack
653.750	0,75L	16
653.020	20L	1



# A.M.G. VENOL WINDOW DE-ICER

Car windshield de-icer effectively removes frost and ice from car windows. It prevents re-freezing of the glass. The de-icer can also be used on frozen car door locks. It is safe for paint, chrome, and rubber.

Item No.	Cap.	Pcs per pack
714.750	0,75L	16
714.020	20L	1



#### A.M.G. VENOL INSECT REMOVER

Insect remover fluid effectively and safely eliminates all insect residues and other road contaminants from car bodywork, windows, headlights, and mirrors. It is safe for paint, plastic, chrome, and rubber.

Item No.	Cap.	Pcs per pack
655.750	0,75L	16
655.020	20L	1



#### A.M.G. VENOL TAR REMOVER

TAR REMOVER is a fully professional product designed to remove stubborn stains of asphalt, tar, and coniferous tree resin that may appear on car paintwork during use. The preparation exhibits excellent cleaning properties. It can also be used to clean tools contaminated with tar and asphalt.

Item No.	Cap.	Pcs per pack
640.750	0,75L	16
640.020	20L	1



# A.M.G. VENOL TEXTILE CLEANER

Upholstery cleaner is an effective product for cleaning upholstery, carpets, and plastics. It penetrates dirt structure, thoroughly cleans even the toughest stains, and restores the natural color of the cleaned surfaces. Please dispose of the empty container in the designated recycling area.

Item No.	Cap.	Pcs per pack
651,750	0,75L	16
651.750	20L	1



# A.M.G. VENOL LEATHER CLEANER

Leather cleaner developed using modern technology, effectively cleans and cares for products made of natural and synthetic leather. Suitable for cleaning and maintaining car upholstery. It impregnates the leather, protects against moisture and UV radiation, and does not cause discoloration. Suitable for all leather colors.

Item No.	Cap.	Pcs per pack
646.750	0,75L	16
646.020	20L	1



## A.M.G. VENOL WHEEL CLEANER

Wheel cleaner developed using modern technology, effectively cleans and cares for steel and aluminum wheels, as well as other aluminum components. It gives cleaned surfaces an intense shine, protects against corrosion, and is safe for tires.

Item No.	Cap.	Pcs per pack
367.750	0,75L	16
367 750	201	1



# A.M.G. VENOL MOTOR CLEANER

Engine cleaner effectively degreases and removes all contaminants (oil, grease, asphalt, atmospheric dirt, etc.) from the engine surface and its components. Regular use reduces mechanical wear of individual engine parts. It protects against corrosion and is environmentally safe.

Item No.	Сар.	Pcs per pack
713.750	0,75L	16
712 020	201	4



# A.M.G. VENOL VD 60

Penetrating lubricant. The product facilitates loosening of seized threaded connections. Suitable for lubricating locks. Protects metal parts against corrosion and adverse weather conditions. Helps dry and remove water from metal parts and electrical connections.

Item No.	Cap.	Pcs per pack
656.750	0,75L	24



# A.M.G. VENOL BRAKE CLEANER SPRAY

BRAKE CLEANER SPRAY is a high-performance and effective product for cleaning, washing, and degreasing metal components of the braking system. It effectively removes contaminants such as oils, greases, and deposits. It evaporates quickly and is metalsafe.

Item No.	Сар.	Pcs per pack
641.600	0,60L	25
641.005	5L	4
641,020	20L	1





# **AUTOMOTIVE CHEMICALS**



# Cleaning fluids and agents



# A.M.G. VENOL PLANKE SUPER COCKPIT- LAVENDER

Gloss-enhancing cleaner for dashboard components. This product is designed for the care of dashboards, vinyl upholstery, and plastic elements. It is also suitable for cleaning furniture. Leaves a shine, enhances and brings out the natural color. Thanks to antistatic additives, it prevents dust accumulation.

Item No.	Cap.	Pcs per pack
735.750	0,75L	24



#### A.M.G. VENOL PLANKE SUPER COCKPIT - VANILLA

Gloss-enhancing cleaner for dashboard components. This product is designed for the care of dashboards, vinyl upholstery, and plastic elements. It is also suitable for cleaning furniture. Leaves a shine, enhances and brings out the natural color. Thanks to antistatic additives, it prevents dust accumulation.

Item No.	Cap.	Pcs per pack		
734 750	0.751	24		



# A,M,G, VENOL PLANKE SUPER COCKPIT - LEMON

Gloss-enhancing cleaner for dashboard components. This product is designed for the care of dashboards, vinyl upholstery, and plastic elements. It is also suitable for cleaning furniture. Leaves a shine, enhances and brings out the natural color. Thanks to antistatic additives, it prevents dust accumulation.

Item No.	Cap.	Pcs per pack
656 750	0.751	24





#### **VENOL GREASE GRAFIT**

Grease intended for lubricating: screw threads, open gear drives, leaf springs, worm gears, chains, and other heavily loaded friction points. It can also be used as an assembly grease. The operating temperature range of the grease is from -20°C to +60°C.

Item No.	Сар.	Pcs per pack	Item No.	Сар.	Pcs per pack
180.040	0,4KG	12	180,010	10KG	1
180.085	0,85KG	12	180.018	18KG	1
180,004	4.5KG	1	180.180	180KG	1



#### **VENOL GREASE STP**

Calcium grease designed for periodic lubrication of car chassis, pins, joints, and other friction points. Operating temperature range: from -20°C to +60°C. It is water-resistant. Not suitable for lubricating rolling bearings or water pumps.

Item No.	Cap.	Pcs per pack	Item No.	Сар.	Pcs per pack
181.040	0,4KG	12	181.010	10KG	1
181.085	0,85KG	12	181.018	18KG	1
181 004	4.5KG	1	181 180	180KG	1



# **VENOL GREASE LT 4 S 3**

Multipurpose lithium grease designed for lubricating rolling bearings, sliding bearings, and other mechanical vehicle components operating under conditions requiring high mechanical stability and resistance to aging. Operating temperature range of the grease: approximately -30°C to 130°C.

Item No.	Сар.	Pcs per pack	Item No.	Сар.	Pcs per pack
183.040	0,4KG	12	183.010	10KG	1
183.085	0,85KG	12	183.018	18KG	1
183,004	4.5KG	1	183,180	180KG	1



#### **VENOL GREASE LT 43**

Multipurpose lithium grease designed for lubricating rolling and sliding bearings, as well as other friction surfaces operating under normal working conditions. The operating temperature range of the grease is from -30°C to 130°C. It features high mechanical stability and is resistant to water.

It	em No.	Cap.	Pcs per pack	Item No.	Сар.	Pcs per pack
1	86.040	0,4KG	12	186.010	10KG	1
1	86.085	0,85KG	12	186.018	18KG	1
1	86 004	4.5KG	1	186,180	180KG	1



# **VENOL GREASE EPX 0**

Gear grease designed for lubricating enclosed cylindrical and bevel gears, as well as rolling and sliding bearings operating under normal conditions. Suitable for use in central lubrication systems. The operating temperature range of the grease is from -30°C to 100°C.

Item No.	Cap.	Pcs per pack	Item No.	Cap.	Pcs per pack
187,004	4,5KG	1	187.180	180KG	1
187,010	10KG	1			
107.010	101/0	4			



# VENOL GREASE EPX OO

Gear grease designed for lubricating enclosed cylindrical and bevel gears, as well as rolling and sliding bearings operating under normal working conditions. It can be used in central lubrication systems. The operating temperature range of the grease is from -30°C to 100°C.

Item No.	Cap.	Pcs per pack	Item No.	Cap.	Pcs per pack
188.004	4,5KG	1	188.180	180KG	1
188.010	10KG	1			
100.010	401/0	4			



# VENOL GREASE EPX 000

Gear grease intended for lubricating enclosed cylindrical and bevel gears, as well as rolling and sliding bearings operating under normal conditions. Suitable for use in central lubrication systems. The operating temperature range of the grease is from -30°C to 100°C.

Item No.	Cap.	Pcs per pack	Item No.	Cap.	Pcs per pack
189,004	4,5KG	1	189,180	180KG	1
189.010	10KG	1			
189.018	18KG	1			



# VENOL GREASE LT 4 EP 2

Grease designed for lubricating rolling and sliding bearings operating under high and shock loads. It can be used for lubricating slow-speed gears, joints, and guides, and is also suitable for use in metal rolling mills, heavy construction machinery, presses, and crushers.

Item No.	Сар.	Pcs per pack	Item No.	Cap.	Pcs per pack
191.040	0,4KG	12	191.018	18KG	1
191.004	4,5KG	1	191.180	180KG	1
191,010	10KG	1			



# **VENOL GREASE LT 4 EP 3**

Grease designed for lubricating rolling and sliding bearings operating under high and shock loads. It can be used for lubricating slow-speed gears, joints, and guides, as well as in metal rolling mills, heavy construction machinery, presses, and crushers. It is resistant to being washed out by water.

Item No.	Cap.	Pcs per pack	Item No.	Сар.	Pcs per pack
192.004	4,5KG	1	192,180	180KG	1
192.010	10KG	1			
192,018	18KG	1			




# **VENOL GREASE BENTOS EP 23**

Grease designed for lubricating rolling and sliding bearings, as well as other friction pairs, operating under high shock loads within the upper temperature range of usability. The operating temperature range of the grease is from -20°C to 200°C. It is not recommended for use on bearings driven by low torque or with low radial clearance. This is a non-melting grease containing molybdenum disulfide, resistant to water washout.

Item No.	Сар.	Pcs per pack
750.010	10KG	1
750.180	180KG	1





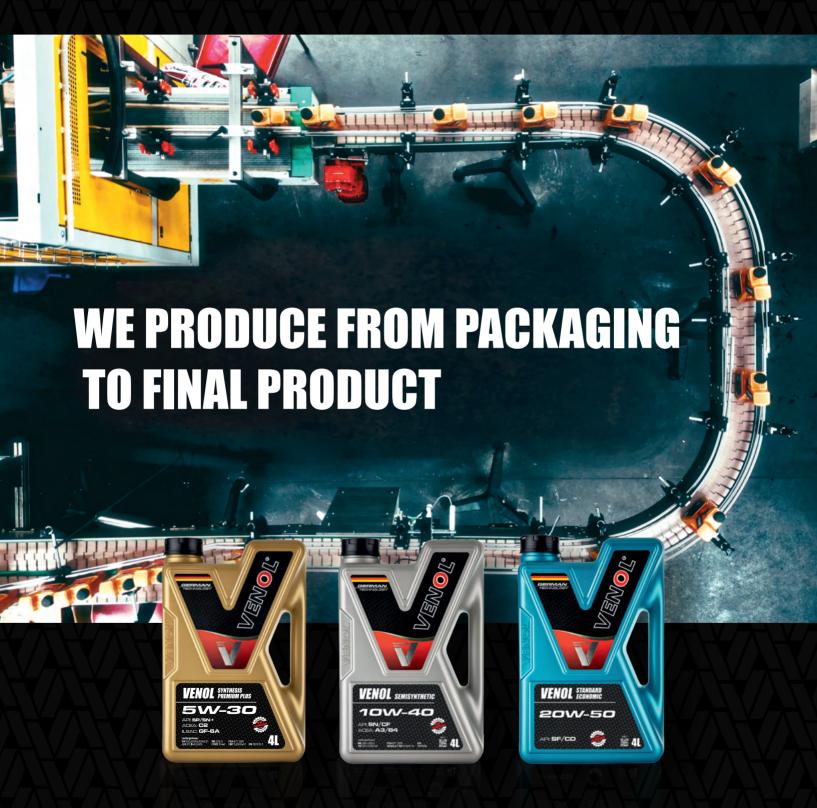




# **EXPANSION INTO GLOBAL MARKETS**





Countries where Venol products are available Venol branches







# CORE BUSINESS

The company deals with activities related to production of high quality lubricating oils for various applications in the automotive and industrial sectors as well as high-quality operating fluids and car care agents. The company's domain is production of the highest quality motor oils of the Active Power group, which is a series of technologically advanced products and raw materials allowing to achieve the highest power with the lowest possible fuel consumption. All products are made of the best components available on the market. For this purpose, we cooperate with such entities as: Afton, Infineum, Chevron, Exxon, Evonik. Currently, products under the VENOL brand are sold in over 70 countries around the world. Recent years in the company's activity are very intense and focused on dynamic development. The company's goal is to implement innovative product solutions and strengthen the export potential of the company.

The high quality of the business is confirmed by the award and maintenance of the Quality Management Systems certificates. A quality assurance system has been in operation since 2000 in accordance with ISO 9001: 2015, certified by the IMQ CSQ.

The dynamic changes on the lubricant market led to cooperation in the field of technology and research with the research and development centres and Universities in Germany. We cooperate with leading manufacturers of combustion engines, which is confirmed by technical approvals. We ensure that we do everything to provide the best products to meet the needs of customers.

# VISION AND OBJECTIVES OF THE COMPANY



CARE FOR GOOD RELATIONS WITH CUSTOMERS AND THEIR SATISFACTION



THE QUALITY MANAGEMENT SYSTEMS CERTIFICATES



QUALIFIED AND EXPERIENCED PERSONNEL GUARANTEES HIGH-QUALITY PRODUCTION



# **VENOL MOTOR OIL**

LITAUISCHE STR. 43, 15234 FRANKFURT (ODER), GERMANY

**EXPORT@VENOL.DE**